



Safety instructions

VEGAPULS 6X

Nonincendive

Four-wire Modbus



Document ID: 1022892



VEGA

Contents

1	Scope	3
2	Type code specification	3
3	Application area	6
4	Specific conditions of use ("X" identification)	7
5	Installation	7
6	Operation	9
7	Electrostatic charging (ESD)	10
8	Electrical data	10
9	Thermal data	10
9.1	Thermal data - General regulations	10
9.2	Thermal data - Gas	12
9.3	Thermal data - Dust	22

Supplementary documentation:

- Operating Instructions VEGAPULS 6X
- Quick setup guide VEGAPULS 6X
- Certificate of Conformity CSA 22 CA 80127301 (Document ID: 66229)
- SIL Safety Manual (Document ID: 66494)
- Further related documentation is available by entering the serial number of the device in the search field on "www.vega.com"

Editing status: 2024-02-05

1 Scope

These safety instructions apply to the radar sensors VEGAPULS 6X of type series:

- PS6X(*).a-b-c-de-f-g-hi-j-k-l-m-*A-p-q-r-s-t-u

With the electronics versions:

- W - Four-wire Modbus

The VEGAPULS 6X are approved acc. to c-CSA-us:

CSA 22 CA 80127301 (certificate number on the type label)

The classification as well as the respective standards are stated in the Certificate of Conformity.

Type of protection marking:

- CI I, Div 2, Gp ABCD T6...T1;
- CI II, Div 2 Gp FG, T*°C; CI III;
- Dual Seal
- Ta = -40 ... +60 °C

2 Type code specification

In the following, all versions are called VEGAPULS 6X. If parts of these safety instructions refer only to certain versions, then these will be mentioned explicitly with their type code.

VEGAPULS 6X with type code PS6X(*).a-b-c-de-f-g-hi-j-k-l-m-no-p-q-r-s-t-u

a	Generation
2	Second generation

b	Application
*	One-digit code for preselection, not relevant for approval

c	Radar technology
W	80 GHz

de	Process fitting / Material
XX	universal, plastic horn antenna / PP/PBT
XC	Mounting strap, length: 170 mm / 316L/316L
XD	Mounting strap, length: 300 mm / 316L/316L
**	Other process fittings that comply with national or international standards

f	Antenna version
B	Plastic horn antenna
T	Thread with integrated antenna system
F	Flange with plastic plating
C	Flange with lens antenna
H	Hygienic fitting
G	with horn antenna (ø 19 mm)
K	with horn antenna (ø 25 mm)

f	Antenna version
L	with horn antenna (ø 40 mm)
N	with horn antenna (ø 48 mm)
D	with horn antenna (ø 75 mm)

g	Additional equipment
X	without
K	with rinsing air connection
V	with purging connection with reflux valve
1	Antenna system DD-lacquered
N	Device Norsok lacquered

hi	Material / Seal / Process temperature
AA	PEEK / FKM (SHS FPM 70C3 GLT) / -40 ... +150 °C
AB	PEEK / FKM (SHS FPM 70C3 GLT) / -40 ... +200 °C
AC	PEEK / FFKM (Kalrez 6230) / -15 ... +150 °C
AD	PEEK / FFKM (Kalrez 6230) / -15 ... +250 °C
AE	PEEK / FFKM (Kalrez 6375) / -20 ... +150 °C
AF	PEEK / FFKM (Kalrez 6375) / -20 ... +250 °C
AG	PEEK / FFKM (Perlast G75B) / -15 ... +150 °C
AH	PEEK / FFKM (Perlast G75B) / -15 ... +250 °C
AJ	PEEK / FFKM (Perlast G74S) / -15 ... +150 °C
AK	PEEK / FFKM (Perlast G74S) / -15 ... +250 °C
AL	PEEK / EPDM (COG AP302) / -40 ... +150 °C (for lens antennas)
AL	PEEK / EPDM (A+P 70.10-02) / -55 ... +150 °C (for threaded version)
AT	PP / PP / -40 ... +80 °C
AU	PP / FKM (SHS FPM 70C3 GLT) / -40 ... +80 °C
AV	PP / EPDM (COG AP310) / -40 ... +80 °C
AW	PTFE / PTFE / -60 ... +150 °C
A4	PTFE / PTFE / -60 ... +200 °C
AX	PTFE / PTFE / -196 ... +200 °C
AY	PTFE (8 mm) / PTFE / -60 ... +150 °C
A5	PTFE (8 mm) / PTFE / -60 ... +200 °C
AZ	PTFE (8 mm) / PTFE / -196 ... +200 °C
A2	PFA (8 mm) / PFA / -60 ... +150 °C
A3	PFA (8 mm) / PFA / -60 ... +200 °C
AM	PVDF / FKM / -40 ... +8 °C
AN	Ceramic / graphite / -196 ... +450 °C
AP	Ceramic / FKM (PPE V71C) / -40 ... +150 °C

hi	Material / Seal / Process temperature
AQ	Ceramic / FFKM (Kalrez 6375) / -20 ... +250 °C
AR	Ceramic / FFKM (Perlast G75B) / -15 ... +250 °C
AS	Ceramic / EPDM / -40 ... +150 °C
A8	PEEK / PEEK / -40 ... +150 °C
A6	PEEK / FKM (COG Vi780) / -40 ... +150 °C
A7	PEEK / EPDM (Freudenberg 291) / -20 ... +150 °C
A1	PTFE / FFKM (Kalrez 6230) / -15 ... +150 °C
A9	PTFE / EPDM (Freudenberg 291) / -20 ... +150 °C

j	Housing / Protection
A	Aluminium single chamber / IP66/IP68 (0.2 bar)
H	Special colour Aluminium single chamber / IP66/IP68 (0.2 bar)
D	Aluminium double chamber / IP66/IP68 (0.2 bar)
S	Special colour Aluminium double chamber / IP66/IP68 (0.2 bar)
V	Stainless steel single chamber (precision casting) / IP66/IP68 (0.2 bar)
W	Stainless steel double chamber / IP66/IP68 (0.2 bar)

k	Cable entry / Connection
D	M20 x 1.5 / Blind plug
1	M20 x 1.5 / without
N	½ NPT / Blind plug
Q	½ NPT / without
*	Other certified connection or cable gland suitable for the application

l	Display, adjustment or radio module
X	without display, adjustment or radio module, standard lid
A	Display and adjustment module PLICSCOM
F	without display, adjustment or radio module, lid with inspection window
B	Display/adjustment module PLICSCOM, laterally mounted
K	Display/adjustment module PLICSCOM, with Bluetooth
L	Display/adjustment module PLICSCOM, laterally mounted; with Bluetooth

m	Electronics
W	Four-wire Modbus

no	Explosion protection
*A	Nonincendive

p	Functional safety SIL (IEC 61508)
X	without

p	Functional safety SIL (IEC 61508)
*	with
q	IT Security (IEC 62443-4-2)
X	without
*	with
r	Overfill protection
X	without
*	with
s	Food/pharmaceutical certificate
X	without
*	with
t	Ship approval
X	without
*	with
u	Secondary Line of Defense
X	without
S	with

3 Application area

Division - The VEGAPULS 6X are suitable for applications Division 2

Application area of VEGAPULS 6X (electronics version W):

Type code	Explosion group	Type of protection marking
Electronics version "W" - four-wire Modbus		
PS6X(*)2*W*****W*A*****	Groups A, B, C, D, F, G	CI I, Div 2, Gp ABCD T6...T1; CI II, Div 2 Gp FG, T°C; CI III; Dual Seal Ta = -40 ... +60 °C

Environmental designation:

Housing	Electronics	Version	Dual Seal	Type of protection
Aluminium, stainless steel (precision casting) double chamber	W	D, S, W	yes	IP66/68 (0.2bar), TYPE 4X/6P

ANSI/UL 50E, CSA C22.2 No. 94.2, NEMA ratings

4 Specific conditions of use ("X" identification)

The following list describes the special operating conditions of VEGAPULS 6X.

- In the application the following applies to the radar sensors VEGAPULS 6X in the versions with Aluminium/Titanium:
 - Installation must be carried out in such a way that the generation of sparks as a result of impact and friction processes between Aluminium/Titanium and steel is excluded. This excludes stainless steel without rust particles.
- Certain components of the radar sensor VEGAPULS 6X can charge electrostatically. These include: Plastic housings, non-grounded metal parts, plastic antennas. For details, refer to chapter "*Electrostatic charge (ESD)*" of these safety instructions.
- To avoid the risk of electrostatic charging of metal parts, the VEGAPULS 6X must be connected to the potential equalization (transition resistance $\leq 1 \text{ M}\Omega$).
- All parts of VEGAPULS 6X in contact with the medium must only be used in such a medium against which the materials are sufficiently resistant.
- VEGAPULS 6X with rinsing connection: It must be ensured that the IP67 degree of protection is provided at the connection to the reflux valve when used as zone 0/1 (EPL Da/Db) instruments. After removing the reflux valve or the rinsing facility on the refölux valve, the opening must be closed with a suitable screw plug so that the IP67 degree of protection is maintained.
- VEGAPULS 6X with swivelling holder: It must be ensured that the IP67 degree of protection is maintained when operating as zone 0/1 (EPL Da/Db) instrument after aligning the antenna using the swivelling holder and after screwing on the tension flange.
- Ambient temperature
 - You can find the details in chapter "*Thermal data*" of these safety instructions.

5 Installation

- The installation of the device must only be carried out by qualified personnel.
- The staff must be trained in explosion protection and familiar with the relevant valid regulations.
- Make sure when working on the instrument that there is no explosive atmosphere present. The supply circuits should be voltage-free, if possible.
- Install the instrument in accordance with the manufacturer specification and the applicable national regulations, e.g. planning and installation in accordance with IEC/EN 60079-14.
- The devices must be integrated into the local potential equalization.
- If grounding of the cable screening is necessary, this must be carried out acc. to the valid standards and regulations, e.g. acc. to IEC/EN 60079-14.
- Close the housing lid (s) up to the stop before starting operating, to ensure the IP protection rating specified on the type label.

For device category 2 the following process pressures are applicable depending on the antenna version:

	Process pressure
Plastic horn antenna, with inspection window	Compression flange -1 ... +2 bar Adapter flange -1 ... +1 bar
Thread with integrated horn antenna, with inspection window	-1 ... +40 bar
Flange with encapsulated antenna system, with inspection window	-1 ... +25 bar
Flange with lens antenna, with inspection window	-1 ... +3 bar
Hygienic version with thread	-1 ... +25 bar
Hygienic version with tension flange or compression nut	-1 ... +16 bar
Horn antenna	-1 ... +100 bar

	Process pressure
Horn antenna for high temperature	-1 ... +160 bar
PVDF version with thread	-1 ... +3 bar


Cable glands, threaded openings

Type	Thread	Cable diameter [mm]	Torques [Nm]
Hummel EXIOS A2F 1.608.2003.50	M20 x 1.5	6 ... 12 mm	8
Hummel EXIOS A2F 1.608.1203.70	½ NPT	6 ... 12 mm	8
Hummel EXIOS MZ 1.6Z5.2000.51	M20 x 1.5	9 ... 13 mm	8
Hummel EXIOS MZ 1.6Z5.1200.70	½ NPT	9 ... 13 mm	8


The specified torques are test torques and can only be regarded as reference values. The manufacturer's mounting instructions provided must be observed.

If suitable cable glands or cable insertion possibilities not included in the scope of supply are used, these must be compatible with the threaded openings.

Aluminium housing with M20 x 1.5 thread, ½ NPT thread

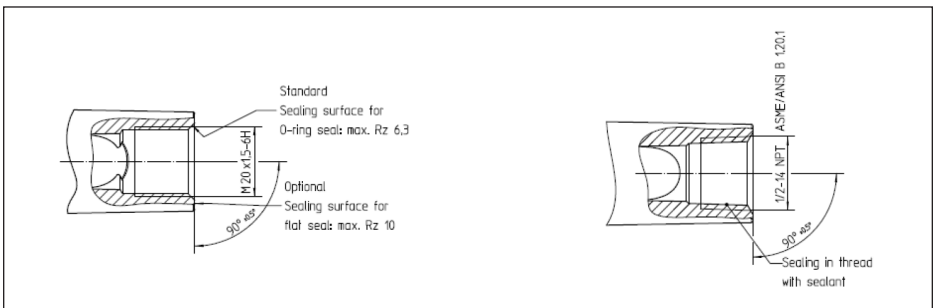

Stainless-steel housing (fine cast) with M20 x 1.5 thread, ½ NPT thread

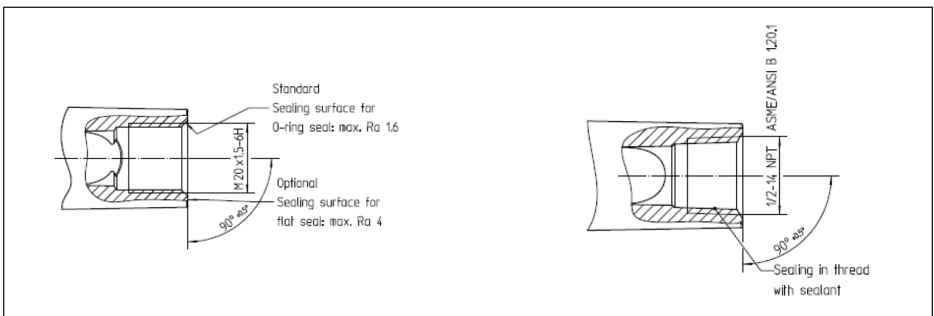

Flameproof enclosure "d"

- The terminals for connecting the operating voltage or signal circuits are integrated in the connection compartment with type of protection flameproof enclosure "d"
- The thread gaps between housing and cover as well as between threaded fitting and container are flameproof joints

- It is not allowed to repair the flameproof joints.
- Cable, wire entries and closing screws must be certified acc. to ignition protection type Flameproof enclosures "d". Cable, wire entries and closing screws of simple design must not be used.
- Separately certified cable and wire entries can determine the permissible ambient temperature range or the temperature classes
- Only one threaded adapter is allowed per thread, when using a closing screw, threaded adapters are not allowed

Maintenance

To ensure the functionality of the device, periodic visual inspection is recommended for:

- Secure mounting
- No mechanical damages or corrosion
- Worn or otherwise damaged cables
- No loose connections of the line connections, equipotential bonding connections
- Correct and clearly marked cable connections

The parts of the VEGAPULS 6X being in contact with flammable media during operation must be included in the periodic overpressure test of the plant.

6 Operation

- Do not operate the device outside the electrical and thermal specifications given in this safety instruction
- Modifications on the instrument can influence the explosion protection and hence the safety
- Modifications must only be carried out by employees authorized by VEGA
- Note the relation between process temperature on the sensor/antenna and the permissible ambient temperature on the electronics housing. For permissible temperatures, see the respective temperature tables. See chapter "*Thermal data*".
- The information on mechanical wear in the operating instructions must be observed
- The continuous operating temperature of the connection cable must be suitable for the temperature range of the application
- Only original spare parts or spare parts approved for the purpose may be used for repairs
- The VEGAPULS 6X must be connected via suitable cable gland or conduit systems that are in conformity with the requirements of the standards and provided with a separate type approval certificate. When connecting the VEGAPULS 6X to conduit systems, the corresponding sealing facility must be connected directly to the housing. Keep the type and size of the threads in mind: The thread names are mentioned on the type label
- Unused openings must be covered according to the standards. The red thread or/dust covers screwed in when the instruments are shipped (depending on the version) must be removed before setup and replaced by cable entries or closing screws suitable for the respective ignition protection type and IP protection.
- The connection cable of VEGAPULS 6X has to be wired fix and in such a way that damages can be excluded
- Lids must not be opened if there is a hazardous atmosphere. The housing lids are marked with the warning label:

WARNING -- DO NOT OPEN WHEN AN EXPLOSIVE ATMOSPHERE IS PRESENT

AVERTISSEMENT -- NE PAS OUVRIR SI UNE ATMOSPHÈRE EXPLOSIVE PEUT ÊTRE PRÉSENTE

7 Electrostatic charging (ESD)

In case of instrument versions with electrostatically chargeable plastic parts, the danger of electrostatic charging and discharging must be taken into account!

The following parts can charge and discharge:

- Lacquered housing version or alternative special lacquering
- Plastic housing, plastic housing parts
- Plastic process fittings
- Plastic-coated process fittings and/or plastic-coated sensors
- Connection cable for separate versions
- Type label

Take note in case of danger of electrostatic charges:

- Avoid friction on the surfaces
- Do not dry clean the surfaces

The instruments must be installed in such a way that the following can be ruled out:

- electrostatic charges during operation, maintenance and cleaning.
- process-related electrostatic charges, e.g. by measuring media flowing past

The warning label indicates danger:

WARNING -- POTENTIAL ELECTROSTATIC CHARGING
HAZARD -- SEE INSTRUCTIONS

AVERTISSEMENT -- DANGER POTENTIEL DE CHARGES
ÉLECTROSTATIQUES -- VOIR INSTRUCTIONS

8 Electrical data

For the VEGAPULS 6X in type of protection Nonincendive applies:

PS6X(*).2*W*****W*A***** Supply circuit: terminals 1[+], 2[-] Supply circuit: terminals 3[D0], 4[D1] Terminals 5[IS GND] USB connection Terminals 1, 2, 3, 4, 5, USB in connection compartment	U = 8 ... 30 V DC $U_{max} = 5 \text{ V}$ with Modbus signal (telegram) Function when installing according to CSA (Canadian Standards Association) $U_{max} = 5 \text{ V}$ with USB signal (USB protocol)
---	--

Display and adjustment circuit	
Indication and adjustment circuit: (spring contacts)	For connection to the display and adjustment module PLICSCOM.

9 Thermal data

9.1 Thermal data - General regulations

The approval is valid under the following conditions:

- Compliance with the temperature ranges for the various versions as indicated in the tables below.
- Pressure: 80 kPa (0.8 bar) to 110 kPa (1.1 bar), and

- Air with an oxygen content of 21 % (v/v)

Additional measures are required for operation of the VEGAPULS 6X outside these conditions.

The operation of the VEGAPULS 6X outside the above conditions is the sole responsibility of the operator.

The thermal measurements for determining the following temperature tables were carried out for process temperatures above +150 °C with insulation. Thermal measurements up to +150 °C were carried out without insulation.

Data sheets of the insulation used:

		SiBa 20/150a/ALU50	SiBa/-a
Data sheet extract insulation		Aluminium foil embossed Basalt/silica compound fleece	Basalt/silica compound fleece
General technical data		SiBa 20/150a/ALU50 is a mechanically bonded needlefelt based on a mixture of endless drawn basalt fibres and silica fibres, laminated with an aluminium foil (thickness approx. 50 µm).	It is a mechanically bonded needlefelt based on a mixture of continuously drawn basalt fibres (approx. 70 %) and silica fibres (approx. 30 %).
Thickness	[mm]	approx. 20	approx. 20
Grammage	[kg/m ²]	approx. 3	approx. 3
Bulk density	[kg/m ³]	approx. 150	approx. 150
Heat resistance in the long term	[°C]	up to 700 Radiant heat on aluminium max. 250	up to 700
Heat resistance in the short term	[°C]	up to 700	up to 700
Cold resistance	[°C]	up to -40	up to -40
Heat conductivity	[W/mK]	0.05 (at 200 °C) 0.15 (at 600 °C)	0.05 (at 200 °C) 0.15 (at 600 °C)
Vibration behaviour		Resistant	Resistant
Physiological behaviour		Harmless	Harmless
Toxicological behaviour		Not dangerous	Not dangerous
Filament diameter	[µm]	> 6	> 6
Flammability		Fire-proof	Fire-proof

For measurements with insulation, a layer thickness of 8 cm SiBa 20/150a was applied. Looking from the surface of the tank, a 6 cm layer of SiBa 20/150a was first applied. A 2 cm layer of SiBa 20/150a/ALU50 was then finally applied on top of this layer.

Max. temperature of VEGAPULS 6X when used in explosive atmospheres:

Max. permissible ambient temperature:	-40 ... +60 °C
Maximum surface temperature of any surface for class III that can come in contact with the atmosphere	+165 °C

9.2 Thermal data - Gas

VEGAPULS 6X with plastic horn antenna for process temperatures up to max. +80 °C

PS6X(*).2*W**B*AT/AU/AV*****

Aluminium/stainless steel housing, version A, H, D, S, V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6 ... T1	-40 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C

VEGAPULS 6X with lens antenna for process temperatures up to max. +150 °C

PS6X(*).2*W**C*****

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +72 °C	-50 ... +72 °C
T4	-60 ... +130 °C	-60 ... +65 °C	-50 ... +65 °C
T3 ... T1	-60 ... +150 °C	-60 ... +61 °C	-50 ... +61 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +70 °C	-50 ... +70 °C
T4	-60 ... +130 °C	-60 ... +59 °C	-50 ... +59 °C
T3 ... T1	-60 ... +150 °C	-60 ... +52 °C	-50 ... +52 °C

VEGAPULS 6X with lens antenna for process temperatures up to max. +195 °C

PS6X(*).2*W**C*****

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T5	-60 ... +95 °C	-60 ... +72 °C	-50 ... +72 °C
T4	-60 ... +130 °C	-60 ... +67 °C	-50 ... +67 °C
T3	-60 ... +150 °C	-60 ... +65 °C	-50 ... +65 °C
T2 ... T1	-60 ... +195 °C	-60 ... +61 °C	-50 ... +61 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +73 °C	-50 ... +73 °C
T4	-60 ... +130 °C	-60 ... +66 °C	-50 ... +66 °C
T3	-60 ... +150 °C	-60 ... +61 °C	-50 ... +61 °C
T2 ... T1	-60 ... +195 °C	-60 ... +54 °C	-50 ... +54 °C

VEGAPULS 6X with lens antenna for process temperatures up to max. +250 °C

PS6X(*).2*W**C*****

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +72 °C	-50 ... +72 °C
T4	-60 ... +130 °C	-60 ... +67 °C	-50 ... +67 °C
T3	-60 ... +150 °C	-60 ... +65 °C	-50 ... +65 °C
T2 ... T1	-60 ... +250 °C	-60 ... +61 °C	-50 ... +61 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +73 °C	-50 ... +73 °C
T4	-60 ... +130 °C	-60 ... +66 °C	-50 ... +66 °C

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T3	-60 ... +150 °C	-60 ... +61 °C	-50 ... +61 °C
T2 ... T1	-60 ... +250 °C	-60 ... +54 °C	-50 ... +54 °C

VEGAPULS 6X with flange, with plastic plating for process temperatures up to max. +150 °C

PS6X(*).2*WF*******

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +70 °C	-50 ... +70 °C
T4	-60 ... +130 °C	-60 ... +59 °C	-50 ... +59 °C
T3 ... T1	-60 ... +150 °C	-60 ... +53 °C	-50 ... +53 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +74 °C	-50 ... +74 °C
T5	-60 ... +95 °C	-60 ... +70 °C	-50 ... +70 °C
T4	-60 ... +130 °C	-60 ... +58 °C	-50 ... +58 °C
T3 ... T1	-60 ... +150 °C	-60 ... +51 °C	-50 ... +51 °C

VEGAPULS 6X with flange, with plastic plating for process temperatures up to max. +195 °C

PS6X(*).2*WF*******

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +71 °C	-50 ... +71 °C
T4	-60 ... +130 °C	-60 ... +62 °C	-50 ... +62 °C

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T3 ... T1	-60 ... +195 °C	-60 ... +58 °C	-50 ... +58 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +70 °C	-50 ... +70 °C
T4	-60 ... +130 °C	-60 ... +61 °C	-50 ... +61 °C
T3 ... T1	-60 ... +195 °C	-60 ... +49 °C	-50 ... +49 °C

**VEGAPULS 6X with flange, with plastic plating for process temperatures up to max. -196 °C
PS6X(*)2*W**F*******

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-196 ... +80 °C	-30 ... +75 °C	-20 ... +75 °C
T5	-196 ... +95 °C	-30 ... +71 °C	-20 ... +71 °C
T4	-196 ... +130 °C	-30 ... +62 °C	-20 ... +62 °C
T3 ... T1	-196 ... +195 °C	-30 ... +58 °C	-20 ... +58 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-196 ... +80 °C	-30 ... +75 °C	-20 ... +75 °C
T5	-196 ... +95 °C	-30 ... +70 °C	-20 ... +70 °C
T4	-196 ... +130 °C	-30 ... +61 °C	-20 ... +61 °C
T3 ... T1	-196 ... +195 °C	-30 ... +49 °C	-20 ... +49 °C

VEGAPULS 6X with thread for process temperatures up to max. +150 °C
PS6X(*)..2*WT*******
Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +70 °C	-50 ... +70 °C
T4	-60 ... +130 °C	-60 ... +59 °C	-50 ... +59 °C
T3 ... T1	-60 ... +150 °C	-60 ... +52 °C	-50 ... +52 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +74 °C	-50 ... +74 °C
T5	-60 ... +95 °C	-60 ... +67 °C	-50 ... +67 °C
T4	-60 ... +130 °C	-60 ... +50 °C	-50 ... +50 °C
T3 ... T1	-60 ... +150 °C	-60 ... +41 °C	-50 ... +41 °C

VEGAPULS 6X with thread for process temperatures up to max. +200 °C
PS6X(*)..2*WT*******
Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +72 °C	-50 ... +72 °C
T4	-60 ... +130 °C	-60 ... +67 °C	-50 ... +67 °C
T3 ... T1	-60 ... +150 °C	-60 ... +62 °C	-50 ... +62 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +73 °C	-50 ... +73 °C

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T4	-60 ... +130 °C	-60 ... +63 °C	-50 ... +63 °C
T3 ... T1	-60 ... +150 °C	-60 ... +54 °C	-50 ... +54 °C

VEGAPULS 6X with thread for process temperatures up to max. +250 °C

PS6X(*) .2*WT*******

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +72 °C	-50 ... +72 °C
T4	-60 ... +130 °C	-60 ... +64 °C	-50 ... +64 °C
T3	-60 ... +150 °C	-60 ... +60 °C	-50 ... +60 °C
T2 ... T1	-60 ... +250 °C	-60 ... +54 °C	-50 ... +54 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +70 °C	-50 ... +70 °C
T4	-60 ... +130 °C	-60 ... +60 °C	-50 ... +60 °C
T3	-60 ... +150 °C	-60 ... +54 °C	-50 ... +54 °C
T2 ... T1	-60 ... +250 °C	-60 ... +44 °C	-50 ... +44 °C

VEGAPULS 6X with G1½, 1½ NPT, PVDF antenna for process temperatures up to max. +80 °C

PS6X(*) .2*WT*AM*******

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T4 ... T1	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +74 °C	-50 ... +74 °C
T5	-60 ... +80 °C	-60 ... +74 °C	-50 ... +74 °C
T4 ... T1	-60 ... +80 °C	-60 ... +74 °C	-50 ... +74 °C

VEGAPULS 6X with hygiene for process temperatures up to max. +150 °C

PS6X(*).2*WXM/XN/XOT*AC/AJ/A6/A7*****

PS6X(*).2*W**H*AC/AJ/A6/A7*****

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-xx ... +80 °C	-60 ... +74 °C	-50 ... +74 °C
T5	-xx ... +95 °C	-60 ... +68 °C	-50 ... +68 °C
T4	-xx ... +130 °C	-60 ... +58 °C	-50 ... +58 °C
T3 ... T1	-xx ... +150 °C	-60 ... +51 °C	-50 ... +51 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-xx ... +80 °C	-60 ... +74 °C	-50 ... +74 °C
T5	-xx ... +95 °C	-60 ... +65 °C	-50 ... +65 °C
T4	-xx ... +130 °C	-60 ... +51 °C	-50 ... +51 °C
T3 ... T1	-xx ... +150 °C	-60 ... +42 °C	-50 ... +42 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- AC PEEK / FKM (Kalrez 6230) / -15 ... +150 °C
- AJ PEEK / FFKM (Perlast G74S) / -15 ... +150 °C
- A6 PEEK / FKM (PPE V70SW) / -10 ... +150 °C
- A7 PEEK / EPDM (Freudenberg 291) / -20 ... +150 °C

VEGAPULS 6X with hygiene LA, LB for process temperatures up to max. +150 °C

PS6X(*).2*WLAH*A1/A9*****

PS6X(*).2*WLBH*A1/A9*****

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-xx ... +80 °C	-60 ... +74 °C	-50 ... +74 °C
T5	-xx ... +95 °C	-60 ... +73 °C	-50 ... +73 °C
T4	-xx ... +130 °C	-60 ... +51 °C	-50 ... +51 °C
T3 ... T1	-xx ... +150 °C	-60 ... +42 °C	-50 ... +42 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-xx ... +80 °C	-60 ... +73 °C	-50 ... +73 °C
T5	-xx ... +95 °C	-60 ... +70 °C	-50 ... +70 °C
T4	-xx ... +130 °C	-60 ... +41 °C	-50 ... +41 °C
T3 ... T1	-xx ... +150 °C	-60 ... +28 °C	-50 ... +28 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **A1** PEEK / FFKM (Kalrez 6230) / -15 ... +150 °C
- **A9** PTFE / EPDM (Freudenberg 291) / -20 ... +150 °C

VEGAPULS 6X with horn antenna for process temperatures up to max. +150 °C

PS6X(*).2*W**G/K/L/N/D*AP/AS*****

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +74 °C	-50 ... +74 °C
T5	-60 ... +95 °C	-60 ... +69 °C	-50 ... +69 °C
T4	-60 ... +130 °C	-60 ... +58 °C	-50 ... +58 °C
T3 ... T1	-60 ... +150 °C	-60 ... +51 °C	-50 ... +51 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +73 °C	-50 ... +73 °C
T5	-60 ... +95 °C	-60 ... +63 °C	-50 ... +63 °C
T4	-60 ... +130 °C	-60 ... +41 °C	-50 ... +41 °C
T3 ... T1	-60 ... +150 °C	-60 ... +28 °C	-50 ... +28 °C

VEGAPULS 6X with horn antenna for process temperatures up to max. +250 °C

PS6X(*)2*W**G/K/L/N/D*AQ/AR*****

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-xx ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-xx ... +95 °C	-60 ... +69 °C	-50 ... +69 °C
T4	-xx ... +130 °C	-60 ... +60 °C	-50 ... +60 °C
T3	-xx ... +195 °C	-60 ... +55 °C	-50 ... +55 °C
T2 ... T1	-xx ... +250 °C	-60 ... +46 °C	-50 ... +46 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-xx ... +80 °C	-60 ... +74 °C	-50 ... +74 °C
T5	-xx ... +95 °C	-60 ... +67 °C	-50 ... +67 °C
T4	-xx ... +130 °C	-60 ... +54 °C	-50 ... +54 °C
T3	-xx ... +195 °C	-60 ... +51 °C	-50 ... +51 °C
T2 ... T1	-xx ... +250 °C	-60 ... +42 °C	-50 ... +42 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **AQ** Ceramic / FFKM (Kalrez 6375) / **-20** ... +250 °C
- **AR** Ceramic / FFKM (Perlast G75B) / **-15** ... +250 °C

VEGAPULS 6X with horn antenna for process temperatures up to max. +440 °C

PS6X(*).2*W**L/N/D*AN*****

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +72 °C	-50 ... +72 °C
T4	-60 ... +130 °C	-60 ... +67 °C	-50 ... +67 °C
T3	-60 ... +195 °C	-60 ... +69 °C	-50 ... +69 °C
T2	-60 ... +290 °C	-60 ... +65 °C	-50 ... +65 °C
T1	-60 ... +440 °C	-60 ... +56 °C	-50 ... +56 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-60 ... +80 °C	-60 ... +75 °C	-50 ... +75 °C
T5	-60 ... +95 °C	-60 ... +70 °C	-50 ... +70 °C
T4	-60 ... +130 °C	-60 ... +63 °C	-50 ... +63 °C
T3	-60 ... +195 °C	-60 ... +66 °C	-50 ... +66 °C
T2	-60 ... +290 °C	-60 ... +61 °C	-50 ... +61 °C
T1	-60 ... +440 °C	-60 ... +51 °C	-50 ... +51 °C

VEGAPULS 6X with horn antenna for process temperatures up to max. -196 °C

PS6X(*).2*W**L/N/D*AN*****

Aluminium housing, version A, H, D, S

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-196 ... +80 °C	-30 ... +75 °C	-10 ... +75 °C
T5	-196 ... +95 °C	-30 ... +72 °C	-10 ... +72 °C
T4	-196 ... +130 °C	-30 ... +67 °C	-10 ... +67 °C
T3	-196 ... +195 °C	-30 ... +69 °C	-10 ... +69 °C
T2	-196 ... +290 °C	-30 ... +65 °C	-10 ... +65 °C
T1	-196 ... +440 °C	-30 ... +56 °C	-10 ... +56 °C

Stainless steel housing, version V, W

T-class	Permissible process temperature range on the antenna in zone 0 (EPL Ga)	Permissible ambient temperature range on the electronics in zone 1 (EPL Gb)	
		without inspection window	with inspection window
T6	-196 ... +80 °C	-30 ... +75 °C	-20 ... +75 °C
T5	-196 ... +95 °C	-30 ... +70 °C	-20 ... +70 °C
T4	-196 ... +130 °C	-30 ... +63 °C	-20 ... +63 °C
T3	-196 ... +195 °C	-30 ... +66 °C	-20 ... +66 °C
T2	-196 ... +290 °C	-30 ... +61 °C	-20 ... +61 °C
T1	-196 ... +440 °C	-30 ... +51 °C	-20 ... +51 °C

For process temperatures between -50 ... +195 °C the lower ambient temperature on the housing can be min. -50 °C (with PLICSCOM) or -60 °C (without PLICSCOM).

For process temperatures lower than the maximum values given in the above tables, higher ambient temperatures on the housing may be permissible. For details, contact VEGA.

The application conditions during operation without hazardous atmospheres can be found in the manufacturer information in the operating instructions manual.

9.3 Thermal data - Dust

Max. surface temperature T_{sur} of VEGAPULS 6X when used in explosive atmospheres:

EPL Da instrument - Complete device (antenna and housing) installed in Zone 20 (surrounded by 200 mm dust):

Max. permissible ambient/process temperature:	+65 °C
Surface temperature:	Ambient/Process temperature +35 K
Max. surface temperature:	= 65 °C + 35 K = 100 °C

EPL Db instrument - Complete device (antenna and housing) installed in Zone 21 (without dust layer):

Max. permissible ambient/process temperature:	+65 °C
Surface temperature:	Ambient/Process temperature +35 K
Max. surface temperature:	= 65 °C + 35 K = +100 °C

EPL Da/Db instrument - Housing installed in Zone 21 without dust layer, antenna installed in Zone 20:

VEGAPULS 6X with plastic horn antenna

PS6X(*).2*WB*AT/AU/AV*******

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-40 ... +76 °C	-40 ... +65 °C	Ambient temperature +35 K	+100 °C

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Stainless steel V, W	-40 ... +76 °C	-40 ... +65 °C	Ambient temperature +35 K	+100 °C

VEGAPULS 6X with G1½, 1½ NPT, PVDF antenna

PS6X(*).2*W**T*AM*****

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-40 ... +76 °C	-40 ... +65 °C	Ambient temperature +35 K	+100 °C
Stainless steel V, W	-40 ... +76 °C	-40 ... +65 °C	Ambient temperature +35 K	+100 °C

VEGAPULS 6X with flange with plastic plating or with integrated antenna system (threaded connection) for process temperatures up to max. +150 °C

PS6X(*).2*W**F*AW/AY/A2*****

PS6X(*).2*W**T*AA/AC/AE/AG/AJ/AL*****

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-xx ... +95 °C	-40 ... +47 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +57 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +48 °C	Ambient temperature +35 K	+152 °C
Stainless steel V, W	-xx ... +95 °C	-40 ... +45 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +47 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +34 °C	Ambient temperature +35 K	+152 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **AA** PEEK / FKM (SHS FPM 70C3-GLT) / -40 ... +150 °C
- **AC** PEEK / FFKM (Kalrez 6230) / -15 ... +150 °C
- **AE** PEEK / FFKM (Kalrez 6375) / -20 ... +150 °C
- **AG** PEEK / FFKM (Perlast G75B) / -15 ... +150 °C
- **AJ** PEEK / FFKM (Perlast G74S) / -15 ... +150 °C
- **AL** PEEK / EPDM (A+P 70.10-02) / -55 ... +150 °C

- **AW** PTFE / PTFE / -60 ... +150 °C
- **AY** PTFE (8 mm) / PTFE / -60 ... +150 °C
- **A2** PFA (8 mm) / PFA / -60 ... +150 °C

VEGAPULS 6X with flange with plastic plating or with integrated antenna system (threaded connection) or with lens antenna for process temperatures up to max. +195 °C

PS6X(*).2*WF*AX/AZ/A3/A4/A5*******

PS6X(*).2*WT*AB*******

PS6X(*).2*WC*AB*******

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-xx ... +95 °C	-40 ... +56 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +72 °C	Ambient temperature +35 K	+132 °C
	-xx ... +195 °C	-40 ... +62 °C	Ambient temperature +35 K	+197 °C
Stainless steel V, W	-xx ... +95 °C	-40 ... +55 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +66 °C	Ambient temperature +35 K	+132 °C
	-xx ... +195 °C	-40 ... +49 °C	Ambient temperature +35 K	+197 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **AB** PEEK / FKM (SHS FPM 70C3-GLT) / -40 ... +200 °C
- **A4** PTFE / PTFE / -60 ... +200 °C
- **A5** PTFE (8 mm) / PTFE / -60 ... +200 °C
- **A3** PFA (8 mm) / PFA / -60 ... +200 °C

VEGAPULS 6X with lens antenna for process temperatures up to max. +150 °C

PS6X(*).2*WC*AA/AC/AE/AG/AJ/AL*******

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-xx ... +95 °C	-40 ... +51 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +65 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +58 °C	Ambient temperature +35 K	+152 °C

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Stainless steel V, W	-xx ... +95 °C	-40 ... +50 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +57 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +48 °C	Ambient temperature +35 K	+152 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **AA** PEEK / FKM (SHS FPM 70C3-GLT) / **-40 ... +150 °C**
- **AC** PEEK / FFKM (Kalrez 6230) / **-15 ... +150 °C**
- **AE** PEEK / FFKM (Kalrez 6375) / **-20 ... +150 °C**
- **AG** PEEK / FFKM (Perlast G75B) / **-15 ... +150 °C**
- **AJ** PEEK / FFKM (Perlast G74S) / **-15 ... +150 °C**
- **AL** PEEK / EPDM (A+P 70.10-02) / **-40 ... +150 °C**

VEGAPULS 6X with integrated antenna system (threaded connection) or with lens antenna for process temperatures up to max. +250 °C

PS6X(*) .2*WC*AD/AF/AH/AK*******

PS6X(*) .2*WT*AD/AF/AH/AK*******

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-xx ... +95 °C	-40 ... +54 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +69 °C	Ambient temperature +35 K	+132 °C
	-xx ... +195 °C	-40 ... +63 °C	Ambient temperature +35 K	+197 °C
	-xx ... +250 °C	-40 ... +55 °C	Ambient temperature +35 K	+252 °C
Stainless steel V, W	-xx ... +95 °C	-40 ... +53 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +65 °C	Ambient temperature +35 K	+132 °C
	-xx ... +195 °C	-40 ... +56 °C	Ambient temperature +35 K	+197 °C
	-xx ... +250 °C	-40 ... +45 °C	Ambient temperature +35 K	+252 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **AD** PEEK / FFKM (Kalrez 6230) / **-15 ... +250 °C**

- **AF** PEEK / FFKM (Kalrez 6375) / -20 ... +250 °C
- **AH** PEEK / FFKM (Perlast G75B) / -15 ... +250 °C
- **AK** PEEK / FFKM (Perlast G74S) / -15 ... +250 °C

VEGAPULS 6X flange with horn antenna for process temperatures up to max. +150 °C

PS6X(*).2*WG/K/L/N/D*AP/AS*******

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-xx ... +95 °C	-40 ... +46 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +60 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +52 °C	Ambient temperature +35 K	+152 °C
Stainless steel V, W	-xx ... +95 °C	-40 ... +46 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +50 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +38 °C	Ambient temperature +35 K	+152 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **AP** Ceramic / FKM (PPE V71C) / -40 ... +150 °C
- **AS** Ceramic / EPDM / -40 ... +150 °C

VEGAPULS 6X with hygiene for process temperatures up to max. +150 °C

PS6X(*).2*WXM/XN/XOT*AC/AJ/A6/A7*****

PS6X(*).2*WH*AC/AJ/A6/A7*******

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-xx ... +95 °C	-40 ... +49 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +63 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +56 °C	Ambient temperature +35 K	+152 °C

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Stainless steel V, W	-xx ... +95 °C	-40 ... +47 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +57 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +48 °C	Ambient temperature +35 K	+152 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **AC** PEEK / FFKM (Kalrez 6230) / **-15 ... +150 °C**
- **AJ** PEEK / FFKM (Perlast G74S) / **-15 ... +150 °C**
- **A6** PEEK / FKM (PPE V70SW) / **-10 ... +150 °C**
- **A7** PEEK / EPDM (Freudenberg 291) / **-20 ... +150 °C**

VEGAPULS 6X with hygiene LA, LB for process temperatures up to max. +150 °C

PS6X(*).2*WLAH*A1/A9*****

PS6X(*).2*WLBH*A1/A9*****

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-xx ... +95 °C	-40 ... +47 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +57 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +48 °C	Ambient temperature +35 K	+152 °C
Stainless steel V, W	-xx ... +95 °C	-40 ... +46 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +48 °C	Ambient temperature +35 K	+132 °C
	-xx ... +150 °C	-40 ... +35 °C	Ambient temperature +35 K	+152 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **A1** PTFE / FFKM (Kalrez 6230) / **-15 ... +150 °C**
- **A9** PTFE / EPDM (Freudenberg 291) / **-20 ... +150 °C**

VEGAPULS 6X flange with horn antenna for process temperatures up to max. +250 °C
PS6X(*) .2*WG/K/L/N/D*AQ/AR*******

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-xx ... +95 °C	-40 ... +51 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +65 °C	Ambient temperature +35 K	+132 °C
	-xx ... +195 °C	-40 ... +59 °C	Ambient temperature +35 K	+197 °C
	-xx ... +250 °C	-40 ... +50 °C	Ambient temperature +35 K	+252 °C
Stainless steel V, W	-xx ... +95 °C	-40 ... +49 °C	Ambient temperature +35 K	+97 °C
	-xx ... +130 °C	-40 ... +59 °C	Ambient temperature +35 K	+132 °C
	-xx ... +195 °C	-40 ... +56 °C	Ambient temperature +35 K	+197 °C
	-xx ... +250 °C	-40 ... +47 °C	Ambient temperature +35 K	+252 °C

xx °C lower temperature in the process, limited by the sealing type with xx:

- **AQ** Ceramic / FFKM (Kalrez 6375) / **-20** ... +250 °C
- **AR** Ceramic / FFKM (Perlast G75B) / **-15** ... +250 °C


VEGAPULS 6X flange with horn antenna for process temperatures up to max. +440 °C
PS6X(*) .2*WL/N/D*AN*******
Important note on the use of the following tables:

With a minimum process temperature of -196 °C, a minimum ambient temperature of -10 °C is still permissible.

With a minimum process temperature of -60 °C, a minimum ambient temperature of -35 °C is still permissible.

With a minimum process temperature of -40 °C, a minimum ambient temperature of -40 °C is still permissible.

Housing (electronics)	Permissible process temperature range on the antenna in zone 20	Permissible ambient temperature range in Zone 21 on the electronics housing	Surface temperature of the electronics housing	Max. surface temperature
Aluminium A, D, H, S	-196 / -60 / -40 ... +95 °C	-10 / -35 / -40 ... +54 °C	Ambient temperature +35 K	+97 °C
	-196 / -60 / -40 ... +130 °C	-10 / -35 / -40 ... +72 °C	Ambient temperature +35 K	+132 °C
	-196 / -60 / -40 ... +195 °C	-10 / -35 / -40 ... +73 °C	Ambient temperature +35 K	+197 °C
	-196 / -60 / -40 ... +290 °C	-10 / -35 / -40 ... +69 °C	Ambient temperature +35 K	+292 °C
	-196 / -60 / -40 ... +440 °C	-10 / -35 / -40 ... +56 °C	Ambient temperature +35 K	+442 °C
Stainless steel V, W	-196 / -60 / -40 ... +95 °C	-10 / -35 / -40 ... +52 °C	Ambient temperature +35 K	+97 °C
	-196 / -60 / -40 ... +130 °C	-10 / -35 / -40 ... +68 °C	Ambient temperature +35 K	+132 °C
	-196 / -60 / -40 ... +195 °C	-10 / -35 / -40 ... +71 °C	Ambient temperature +35 K	+197 °C
	-196 / -60 / -40 ... +290 °C	-10 / -35 / -40 ... +66 °C	Ambient temperature +35 K	+292 °C
	-196 / -60 / -40 ... +440 °C	-10 / -35 / -40 ... +51 °C	Ambient temperature +35 K	+442 °C

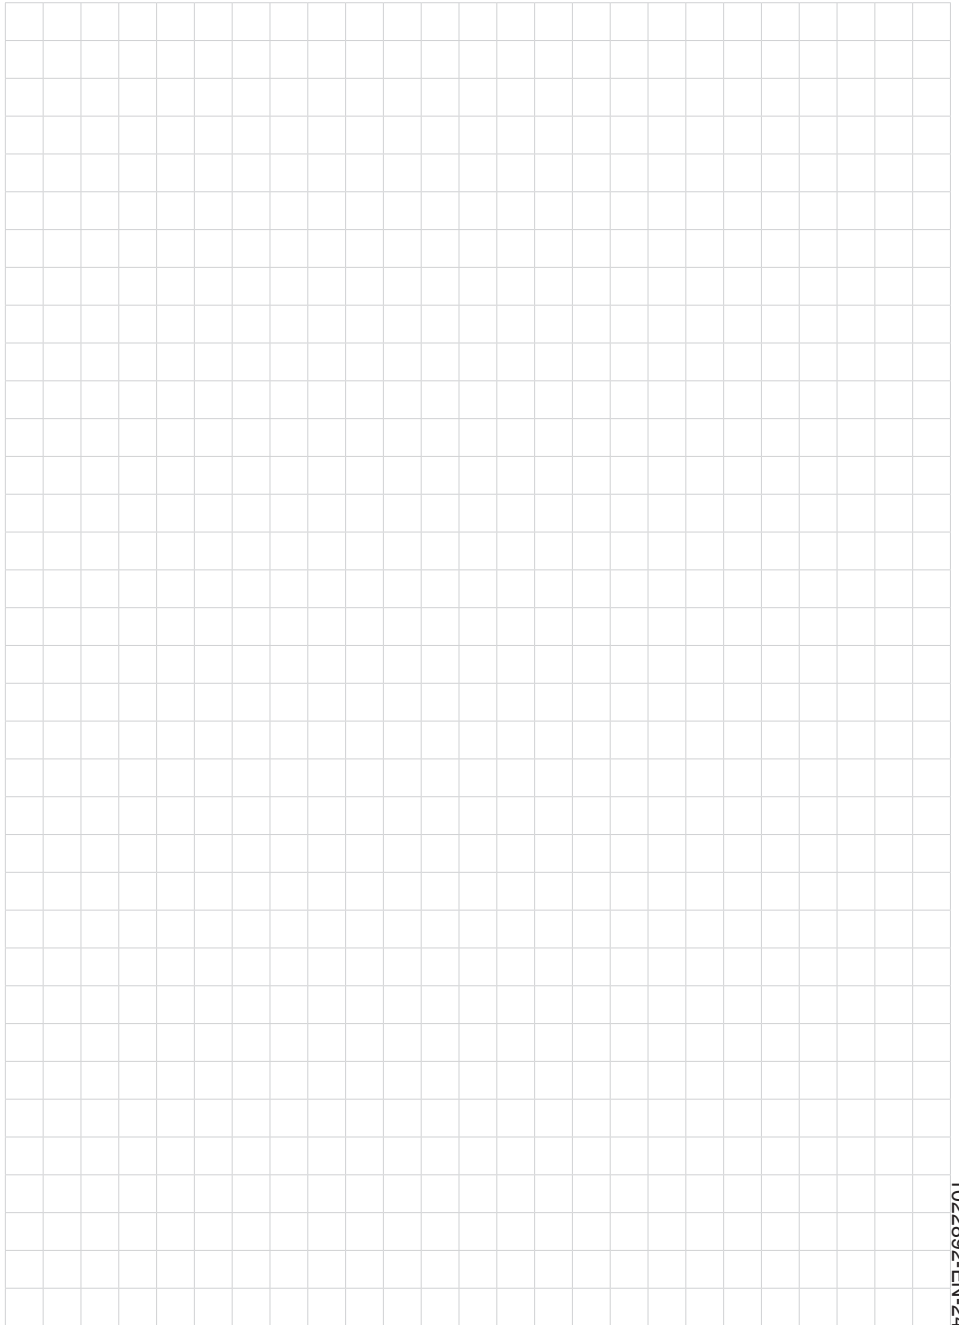

Printing date:

VEGA

All statements concerning scope of delivery, application, practical use and operating conditions of the sensors and processing systems correspond to the information available at the time of printing.

Subject to change without prior notice

© VEGA Grieshaber KG, Schiltach/Germany 2024

1022892-EN-240312

VEGA Grieshaber KG
Am Hohenstein 113
77761 Schiltach
Germany

Phone +49 7836 50-0
E-mail: info.de@vega.com
www.vega.com