



### Reliable

Reliable measurement, independent of both ambient and process conditions

### Cost effective

Highly resistant materials ensure a long service life

### User friendly


Simple installation and setup

## Reaction vessel

### Level measurement and point level detection in the reaction vessel

Changing media, as well as process pressures and temperatures, characterize the typical reaction processes in a reaction vessel. This is a big engineering challenge, because any sensors used to control the process need to deliver reliable measurements under these conditions. To meet the diverse conditions found in reaction vessels, level measurement and point level detection instrumentation must cover a broad spectrum of applications.

[More details](#)

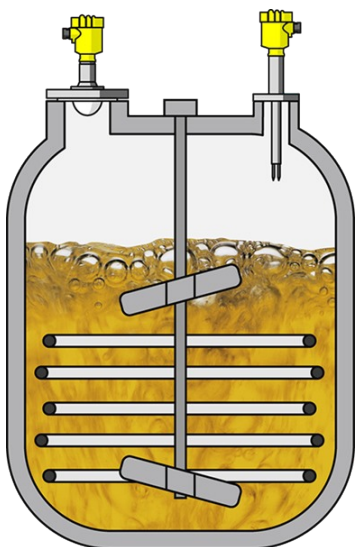

### VEGAPULS 6X

Non-contact level measurement with radar in reaction vessels

- Measuring result unaffected by agitator thanks to false signal suppression
- High chemical resistance through PTFE antenna cover
- Small process fittings allow easy installation

[Show Product](#)



### VEGASWING 63

Vibrating level switch for liquids for level detection as overflow and dry run protection system in the reaction vessel

- Media-independent switching point, reliable level information
- Highly resistant materials and coatings allow use in a variety of media
- Test button for easy testing of instrument functionality during operation

[Show Product](#)

PRO

## VEGAPULS 6X

[Show Product](#)



**Measuring range - Distance**  
120 m

**Process temperature**  
-196 ... 450 °C

**Process pressure**  
-1 ... 160 bar

**Accuracy**  
± 1 mm

**Frequency**  
6 GHz  
26 GHz  
80 GHz

**Beam angle**  
≥ 3°

**Materials, wetted parts**  
PTFE  
PVDF  
316L  
PP  
PEEK

**Threaded connection**  
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

**Flange connection**  
≥ DN20, ≥  $\frac{3}{4}$ "

**Hygienic fittings**  
Clamp ≥ 1 $\frac{1}{2}$ " - DIN32676, ISO2852  
Slotted nut ≥ 2", DN50 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting with tension flange DN32  
hygienic fitting F40 with compression nut  
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A  
Hygienic flange connection ≥ DN50 DIN11864-2  
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A  
DRD connection ø 65 mm  
SMS 1145 DN51

PRO

## VEGASWING 63

[Show Product](#)



**Process temperature**  
-50 ... 250 °C

**Process pressure**  
-1 ... 64 bar

**Version**  
Standard  
Hygienic applications  
with gas-tight leadthrough  
with tube extension  
with temperature adapter

**Materials, wetted parts**  
PFA  
316L  
Alloy C22 (2.4602)  
Alloy 400 (2.4360)  
ECTFE  
Enamel

**Threaded connection**  
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

**Flange connection**  
≥ DN25, ≥ 1"

**Hygienic fittings**  
Clamp ≥ 1" - DIN32676, ISO2852  
Slotted nut ≥ 1 $\frac{1}{2}$ ", ≥ DN40 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting F40 with compression nut  
SMS 1145 DN51  
SMS DN38  
Hygienic fittings ≥ DN25 - DIN11864-1-A  
Hygienic flange connection DIN11864-2-A;  
DN60(ISO)ø60,3  
SMS socket piece DN38 PN6

**Seal material**  
no media contact

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

**Protection rating**  
IP66/IP67  
IP66/IP68 (1 bar)  
IP65