



Reliable

Reliable measurement despite changing belt tension and vibrations

Cost effective

Optimal mass flow measurement allows exact accounting of bulk solids

User friendly


Maintenance-free operation

Conveyor belt

Mass flow measurement on conveyor belts

Bulk aggregates are fed into production processes via conveyor belts or screw conveyors. For effective feed control to and from these processes, or inter-production unit billing, the mass flow of the conveyed bulk material must be measured. A reliable belt-weighing scale system and mass flow rate ensures accurate measurement and smooth operation of the plant.

[More details](#)

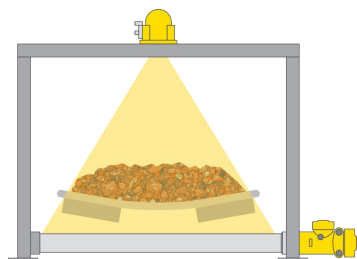

WEIGHTRAC 31

Radiometric mass flow measurement of solids on conveyor belts

- Reliable measurement, independent of dust and dirt
- Accurate and repeatable mass flow measurement
- Wear-free, contactless weighing

[Show Product](#)

PRO

WEIGHTRAC 31

[Show Product](#)



Measuring range - Distance

-

Measuring range - Pressure

-

Process temperature

-40 ... 60 °C

Accuracy

1 %

Materials, wetted parts

No wetted material

Seal material

no media contact

Housing material

Aluminium
Stainless steel (precision casting)

Protection rating

IP66/IP67

Output

Profibus PA
Foundation Fieldbus
Four-wire: 4 ... 20 mA/HART

Ambient temperature

-40 ... 60 °C