



Reliable

Safe measurement unaffected by changing medium properties

Cost effective

Reliable control of the interface ensures effective operation

User friendly


Simple and easy setup

Oil skim tank

Level measurement and point level detection in the oil skim tank

Accurate measurement in oil skim and separation tanks is critical to product quality because there is complete separation of oil and gas possible. For liquid-liquid interface monitoring an accurate measurement helps control the quality of the separator's output and thus helps to extend equipment life in downstream units by avoiding any potentially expensive impurity problems.

[More details](#)

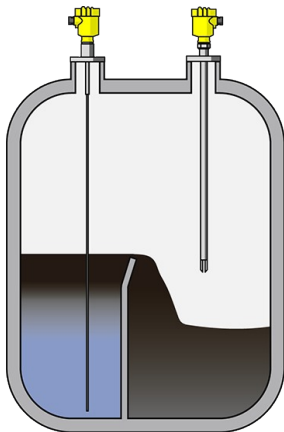

VEGASWING 63

Vibrating level switch as overflow protection in the oil skim tank

- Non-moving parts reduce maintenance needs
- Unaffected by process conditions
- Product independent switching point
- Simple setup without adjustment

[Show Product](#)



VEGAFLEX 81

Guided wave radar for interface control in the oil skim tank

- Non-moving parts eliminate maintenance needs
- Almost independent of buildup and condensate
- Immunity to the crude supply density changes offers reliable continuous level control

[Show Product](#)

PRO

VEGASWING 63

[Show Product](#)



Process temperature
-50 ... 250 °C

Process pressure
-1 ... 64 bar

Version
Standard
Hygienic applications
with gas-tight leadthrough
with tube extension
with temperature adapter

Materials, wetted parts
PFA
316L
Alloy C22 (2.4602)
Alloy 400 (2.4360)
ECTFE
Enamel

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN25, ≥ 1"

Hygienic fittings
Clamp ≥ 1" - DIN32676, ISO2852
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
Varivent ≥ DN25
hygienic fitting F40 with compression nut
SMS 1145 DN51
SMS DN38
Hygienic fittings ≥ DN25 - DIN11864-1-A
Hygienic flange connection DIN11864-2-A;
DN60(ISO)ø60,3
SMS socket piece DN38 PN6

Seal material
no media contact

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP67
IP66/IP68 (1 bar)
IP65

PRO

VEGAFLEX 81

[Show Product](#)



Measuring range - Distance
75 m

Process temperature
-60 ... 200 °C

Process pressure
-1 ... 40 bar

Accuracy
± 2 mm

Version
Basic version for exchangeable cable ø 2; ø 4 mm
Basic version for exchangeable rod ø 8 mm
Basic version for exchangeable rod ø 12 mm
Coax version ø 21.3 mm for ammonia application
Coax version ø 21.3 mm with single hole
Coax version ø 21.3 mm with multiple hole
Coax version ø 42.2 mm with multiple hole
Exchangeable rod ø 8 mm
Exchangeable rod ø 12 mm
Exchangeable cable ø 2 mm with gravity weight
Exchangeable cable ø 4 mm with gravity weight
Exchangeable cable ø 2 mm with centering weight
Exchangeable cable ø 4 mm with centering weight
Exchangeable cable ø 4 mm without weight
exchangeable, PFA-coated cable ø4 mm with non-coated
centering weight

Materials, wetted parts
PFA
316L
Alloy C22 (2.4602)
Alloy 400 (2.4360)
Alloy C276 (2.4819)
Duplex (1.4462)
304L

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN25, ≥ 1"

Seal material
EPDM
FKM
FFKM
Silicone FEP coated
Borosilicate glass

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)