



#### Reliable

Reliable measurement despite strong vibration

#### Cost effective

High abrasion resistance guarantees long operation

#### User friendly


Self-cleaning and maintenance-free thanks to front-flush mounting

## Pressure screen

### Pressure measurement in the pressure screen

Pressure screens are used to filter out impurities and separate fibres in stock preparation. A rotating screen basket inside the filter does the actual filtering. Pressure screens have an inlet for the suspension, an outlet for accepted stock and a discharge for rejected stock and contaminants. The process conditions are characterized by pressure surges as well as abrasion and contaminants in the stock. Efficient screening requires a controlled pressure difference between inlet and outlet, which therefore requires continuous, reliable measurement.

[More details](#)

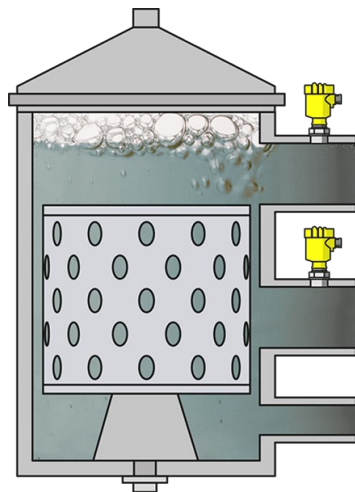

### VEGABAR 82

Pressure transmitter for pressure measurement in the pressure screen

- Front-flush installation with self-cleaning effect
- High abrasion resistant ceramic for a long service life
- Highly resistant to overload from pressure surges

[Show Product](#)

## VEGABAR 82

[Show Product](#)**Measuring range - Distance**

-

**Measuring range - Pressure**

-1 ... 100 bar

**Process temperature**

-40 ... 150 °C

**Process pressure**

-1 ... 100 bar

**Accuracy**

0.05 %

**Materials, wetted parts**

PVDF

316L

Alloy C22 (2.4602)

PP

1.4057

1.4410

Alloy C276 (2.4819)

Duplex (1.4462)

Titanium Grade 2 (3.7035)

**Threaded connection**

≥ G½, ≥ ½ NPT

**Flange connection**

≥ DN15, ≥ ½"

**Hygienic fittings**

Clamp ≥ 1" - DIN32676, ISO2852

Slotted nut ≥ DN25 - DIN 11851

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

DRD connection ø 65 mm

SMS 1145 DN51

SMS DN38

Swagelok VCR screwing

Varivent G125

Varivent N50-40

for NEUMO BioControl D50 PN16 / 316L

**Seal material**

EPDM

FKM

FFKM