



Reliable

Reliable measurement despite strong vibration

Cost effective

High abrasion resistance guarantees long operation

User friendly


Self-cleaning and maintenance-free thanks to front-flush mounting

Pressure screen

Pressure measurement in the pressure screen

Pressure screens are used to filter out impurities and separate fibres in stock preparation. A rotating screen basket inside the filter does the actual filtering. Pressure screens have an inlet for the suspension, an outlet for accepted stock and a discharge for rejected stock and contaminants. The process conditions are characterized by pressure surges as well as abrasion and contaminants in the stock. Efficient screening requires a controlled pressure difference between inlet and outlet, which therefore requires continuous, reliable measurement.

[More details](#)

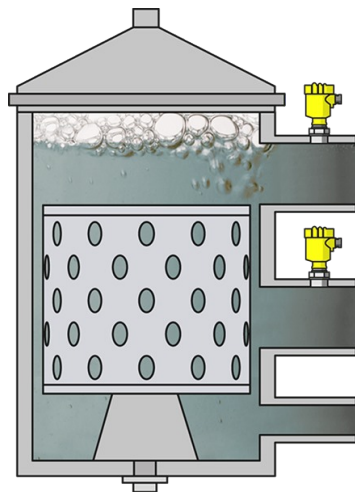

VEGABAR 82

Pressure transmitter for pressure measurement in the pressure screen

- Front-flush installation with self-cleaning effect
- High abrasion resistant ceramic for a long service life
- Highly resistant to overload from pressure surges

[Show Product](#)

VEGABAR 82

[Show Product](#)**Measuring range - Distance**

-

Measuring range - Pressure

-1 ... 100 bar

Process temperature

-40 ... 150 °C

Process pressure

-1 ... 100 bar

Accuracy

0.05 %

Materials, wetted parts

PVDF
 316L
 Alloy C22 (2.4602)
 PP
 1.4057
 1.4410
 Alloy C276 (2.4819)
 Duplex (1.4462)
 Titanium Grade 2 (3.7035)

Threaded connection

≥ G½, ≥ ½ NPT

Flange connection

≥ DN15, ≥ ½"

Hygienic fittings

Clamp ≥ 1" - DIN32676, ISO2852
 Slotted nut ≥ DN25 - DIN 11851
 hygienic fitting with tension flange DN32
 hygienic fitting F40 with compression nut
 DRD connection ø 65 mm
 SMS 1145 DN51
 SMS DN38
 Swagelok VCR screwing
 Varivent G125
 Varivent N50-40
 for NEUMO BioControl D50 PN16 / 316L

Seal material

EPDM
 FKM
 FFKM