



Reliable

Protects the drainage pumps from running dry

Cost effective

Protective PE coating ensures long-term measurement availability

User friendly


Simple installation and setup

Leachate well

Level measurement in the leachate well

Pollutants contained in the waste are partly washed out over time by rainwater, posing a significant threat to groundwater and surface water. For that reason, leachate is caught in drains within the ground seal or liner, collected in wells and fed to a multistage treatment plant. To control the submersible drainage pumps, a level measuring system is needed inside the leachate well.

[More details](#)

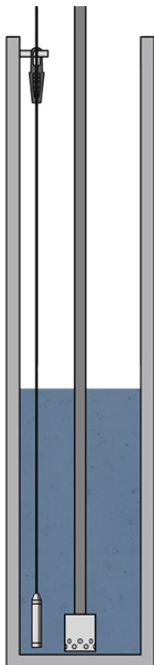

VEGAWELL 52

Submersible pressure transmitter for level measurement in leachate wells

- Wear-free and abrasion resistant CERTEC® ceramic measuring cell
- High measurement certainty guaranteed by proven measurement technology

[Show Product](#)

PRO

VEGAWELL 52

[Show Product](#)



Measuring range - Pressure

0 ... 60 bar

Process temperature

-20 ... 80 °C

Process pressure

-

Accuracy

0.1 %

Materials, wetted parts

PVDF
316L
Duplex (1.4462)
FEP
PE
1.4301
Titanium

Seal material

EPDM
FKM
FFKM

Protection rating

IP66/IP67
IP68

Output

4 ... 20 mA
Two-wire: 4 ... 20 mA/HART

Ambient temperature

-40 ... 80 °C