



Reliable

Optimum protection against overfilling

Cost effective

Continuous measurement allows maximum use of container

User friendly


Reliable, maintenance-free operation

Sludge granulate silo

Level measurement and point level detection in the sludge granulate silo

After thermal drying, the sludge is stored in silos for further use. The granulated product is deposited in landfills, used in agriculture or burned for energy generation. The level measurement and point level detection ensure that the container volume is optimally utilized.

More details

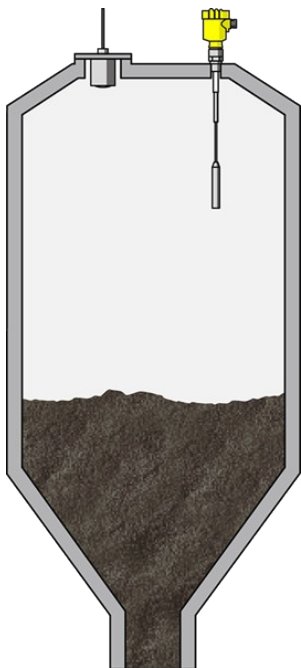

VEGAPULS C 23

Continuous radar level measurement of the sludge granulate silo

- Simple mounting and setup
- Unaffected by dust generation
- Maintenance free thanks to contactless measurement
- Wireless operation via Bluetooth with smartphone, tablet or PC

Show Product



VEGACAP 65

Capacitive point level detection for filling control

- Reliable full-level signal during filling
- Robust mechanical design of sensor ensures a long service life
- Shortenable cable length for easy adaptation to local conditions

Show Product



VEGATOR 141

Double channel signal conditioning instrument for level detection

- Simple adjustment of the switching point through a potentiometer
- Clearly visible switching status via LED
- Simple installation through carrier rail mounting as well as detachable, coded terminals

Show Product

BASIC

VEGAPULS C 23

[Show Product](#)**Measuring range - Distance**

30 m

Process temperature

-40 ... 80 °C

Process pressure

-1 ... 3 bar

Accuracy

± 2 mm

Frequency

80 GHz

Beam angle

4°

Materials, wetted parts

PVDF

Threaded connection

G1, 1 NPT, R1

Protection rating

IP66/IP68 (3 bar), Type 6P

Output4 ... 20 mA/HART
Modbus
SDI-12

PRO

VEGACAP 65

[Show Product](#)**Measuring range - Distance**

-

Process temperature

-50 ... 200 °C

Process pressure

-1 ... 64 bar

VersionCable ø 6 mm with screening tube without weight
Cable ø 6 mm with screening tube and gravity weight
Cable ø 6 mm with gravity weight
Cable ø 8 mm with abrasion protection without weight
Cable ø 8 mm with abrasion protection and gravity weight
Cable ø 8 mm with gravity weight
PA cable ø 12 mm with screening tube and gravity weight**Materials, wetted parts**PTFE
316L
PA
PEEK
Steel**Threaded connection**

≥ G1, ≥ 1 NPT

Flange connection

≥ DN50, ≥ 2"

Housing materialPlastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)**Protection rating**IP66/IP68 (0,2 bar)
IP66/IP67
IP66/IP68 (1 bar)**Output**Relay (DPDT)
Contactless electronic switch
Transistor (NPN/PNP)
Two-wire

VEGATOR 141

[Show Product](#)**Protection rating**

IP20

Input

1 x 4 ... 20 mA sensor input

Output1 x operating relay (SPDT)
Optionally 1 x fail safe relay output (SPDT)**Ambient temperature**

-20 ... 60 °C

Signal input (specify)

4 ... 20 mA

Signal output (specify)Operating relay
Fail safe relay