



Reliable

Optimum protection against overfilling

Cost effective

Continuous measurement allows maximum use of container

User friendly


Reliable, maintenance-free operation

Sludge granulate silo

Level measurement and point level detection in the sludge granulate silo

After thermal drying, the sludge is stored in silos for further use. The granulated product is deposited in landfills, used in agriculture or burned for energy generation. The level measurement and point level detection ensure that the container volume is optimally utilized.

More details

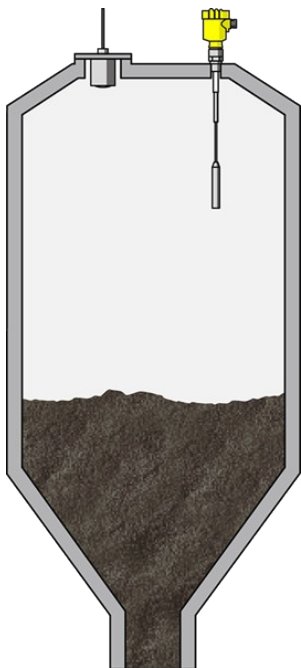

VEGAPULS C 23

Continuous radar level measurement of the sludge granulate silo

- Simple mounting and setup
- Unaffected by dust generation
- Maintenance free thanks to contactless measurement
- Wireless operation via Bluetooth with smartphone, tablet or PC

Show Product



VEGACAP 65

Capacitive point level detection for filling control

- Reliable full-level signal during filling
- Robust mechanical design of sensor ensures a long service life
- Shortenable cable length for easy adaptation to local conditions

Show Product



VEGATOR 141

Double channel signal conditioning instrument for level detection

- Simple adjustment of the switching point through a potentiometer
- Clearly visible switching status via LED
- Simple installation through carrier rail mounting as well as detachable, coded terminals

Show Product

BASIC

VEGAPULS C 23

[Show Product](#)**Measuring range - Distance**

30 m

Process temperature

-40 ... 80 °C

Process pressure

-1 ... 3 bar

Accuracy

± 2 mm

Frequency

80 GHz

Beam angle

4°

Materials, wetted parts

PVDF

Threaded connection

G1, 1 NPT, R1

Protection rating

IP66/IP68 (3 bar), Type 6P

Output

4 ... 20 mA/HART

Modbus

SDI-12

PRO

VEGACAP 65

[Show Product](#)**Measuring range - Distance**

-

Process temperature

-50 ... 200 °C

Process pressure

-1 ... 64 bar

Version

Cable ø 6 mm with screening tube without weight
 Cable ø 6 mm with screening tube and gravity weight
 Cable ø 6 mm with gravity weight
 Cable ø 8 mm with abrasion protection without weight
 Cable ø 8 mm with abrasion protection and gravity weight
 Cable ø 8 mm with gravity weight
 PA cable ø 12 mm with screening tube and gravity weight

Materials, wetted parts

PTFE

316L

PA

PEEK

Steel

Threaded connection

≥ G1, ≥ 1 NPT

Flange connection

≥ DN50, ≥ 2"

Housing material

Plastic

Aluminium

Stainless steel (precision casting)

Stainless steel (electropolished)

Protection rating

IP66/IP68 (0,2 bar)

IP66/IP67

IP66/IP68 (1 bar)

Output

Relay (DPDT)

Contactless electronic switch

Transistor (NPN/PNP)

Two-wire

VEGATOR 141

[Show Product](#)**Protection rating**

IP20

Input

1 x 4 ... 20 mA sensor input

Output

1 x operating relay (SPDT)

Optionally 1 x fail safe relay output (SPDT)

Ambient temperature

-20 ... 60 °C

Signal input (specify)

4 ... 20 mA

Signal output (specify)

Operating relay

Fail safe relay