



Reliable

Redundant measurement for highest safety standards

Cost effective

Universal applicable for almost all liquids

User friendly


Easy installation and setup

Holding tanks

Level measurement and point level detection of holding tanks

Buffer and storage tanks are needed at numerous places in refineries for storing the input and output materials of the various process steps. The containers have different geometries, ranging from horizontal or vertical spherical tanks to horizontal cylindrical tanks to portable plastic containers. To run the refining processes effectively, which includes ensuring the availability of the media, it is crucial to know the exact levels in these storage tanks at all times.

[More details](#)

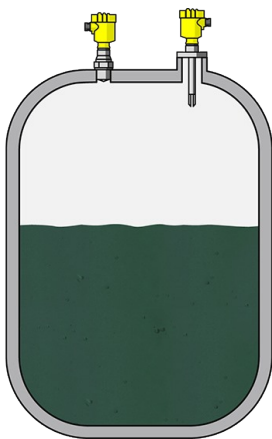

VEGAPULS 6X

Level measurement with radar in holding tanks

- Simple retrofit capability utilizes existing process fittings
- Exact measuring results independent of pressure, temperature, gas or steam
- Very good signal focussing ensures accurate measurement even in small and narrow tanks

[Show Product](#)



VEGASWING 63

Vibrating level switch for overflow protection in holding tanks

- Additional level switch provides redundancy
- Simple function test via keystroke increases availability without interrupting the process
- Unaffected by media properties, ensures reliable point level detection

[Show Product](#)

PRO

VEGAPULS 6X

[Show Product](#)



Measuring range - Distance
120 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 1 mm

Frequency
6 GHz
26 GHz
80 GHz

Beam angle
≥ 3°

Materials, wetted parts
PTFE
PVDF
316L
PP
PEEK

Threaded connection
≥ G $\frac{3}{4}$, ≥ $\frac{3}{4}$ NPT

Flange connection
≥ DN20, ≥ $\frac{3}{4}$ "

Hygienic fittings
Clamp ≥ 1 $\frac{1}{2}$ " - DIN32676, ISO2852
Slotted nut ≥ 2", DN50 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A
Hygienic flange connection ≥ DN50 DIN11864-2
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A
DRD connection ø 65 mm
SMS 1145 DN51

PRO

VEGASWING 63

[Show Product](#)



Process temperature
-50 ... 250 °C

Process pressure
-1 ... 64 bar

Version
Standard
Hygienic applications
with gas-tight leadthrough
with tube extension
with temperature adapter

Materials, wetted parts
PFA
316L
Alloy C22 (2.4602)
Alloy 400 (2.4360)
ECTFE
Enamel

Threaded connection
≥ G $\frac{3}{4}$, ≥ $\frac{3}{4}$ NPT

Flange connection
≥ DN25, ≥ 1"

Hygienic fittings
Clamp ≥ 1" - DIN32676, ISO2852
Slotted nut ≥ 1 $\frac{1}{2}$ ", ≥ DN40 - DIN 11851
Varivent ≥ DN25
hygienic fitting F40 with compression nut
SMS 1145 DN51
SMS DN38
Hygienic fittings ≥ DN25 - DIN11864-1-A
Hygienic flange connection DIN11864-2-A;
DN60(ISO)ø60,3
SMS socket piece DN38 PN6

Seal material
no media contact

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP67
IP66/IP68 (1 bar)
IP65