



Reliable


Non-invasive measurement ensures highest plant availability

Cost effective

Lightweight design reduces mounting costs

User friendly

External mounting does not interrupt the process

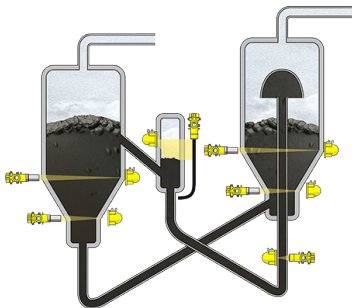

Fluid catalytic cracking unit

Density, level measurement and point level detection in the reactor

Fluid Catalytic Cracking (FCC) is one of the most important conversion processes used in petroleum refineries. As with many other refining applications, the vessels in the reactor system need to be operated and controlled at their optimum levels, as this is critical for the process productivity. Maintaining the proper levels also ensures that the expensive catalyst is used at maximum efficiency, with no waste.

[More details](#)



POINTRAC 31

Radiation-based sensor for point level detection

- Accurate measuring results independent of process conditions
- Non-contact operation is unaffected by buildup
- External mounting does not interrupt the process

[Show Product](#)



FIBERTRAC 31

Radiation-based sensor for continuous level measurement

- Lightweight construction eliminates need for cranes or special rigging for mounting
- Long detector length minimizes the need for additional platform construction

[Show Product](#)



MINITRAC 31

Radiation-based sensor for density measurement

- Compact and lightweight detector mounts easily
- External mounting does not interrupt the process
- Non-contact technology measures through vessel walls and obstructions
- Simple and intuitive setup

[Show Product](#)

PRO

POINTRAC 31
[Show Product](#)



Measuring range - Distance
 -

Process temperature
 -40 ... 60 °C

Process pressure
 -

Materials, wetted parts
 No wetted material

Seal material
 no media contact

Housing material
 Aluminium
 Stainless steel (precision casting)

Protection rating
 IP66/IP67

Output
 Profibus PA
 Foundation Fieldbus
 8/16 mA/HART - four-wire

Ambient temperature
 -40 ... 60 °C

PRO

FIBERTRAC 31
[Show Product](#)



Measuring range - Distance
 7 m

Process temperature
 -

Process pressure
 -

Accuracy
 $\pm 0.5 \%$

Density
 Density

Materials, wetted parts
 No wetted material

Threaded connection
 Mounting from outside via supplied mounting brackets

Seal material
 no media contact

Housing material
 Aluminium
 Stainless steel (precision casting)

Protection rating
 IP66/IP67

PRO

MINITRAC 31
[Show Product](#)



Measuring range - Distance
 -

Process temperature
 -40 ... 60 °C

Process pressure
 -

Accuracy
 0.1 %

Materials, wetted parts
 No wetted material

Seal material
 no media contact

Housing material
 Aluminium
 Stainless steel (precision casting)

Protection rating
 IP66/IP67

Output
 Profibus PA
 Foundation Fieldbus
 Four-wire: 4 ... 20 mA/HART

Ambient temperature
 -40 ... 60 °C