



#### Reliable

Reliable protection against overflowing

#### Cost effective

Independent of product and process characteristics

#### User friendly


Simple to set up with maintenance-free operation

## Storage and buffer tanks

### Level measurement and point level detection in small storage and buffer tanks

Storage and buffer tanks enable a reliable material supply for various ongoing processes. The plant operators need to have exact level data from these tanks at all times to ensure timely replenishment and facilitate continuous production. In addition, the measured values form the basis of the statistical consumption analysis for validation and quality monitoring.

[More details](#)

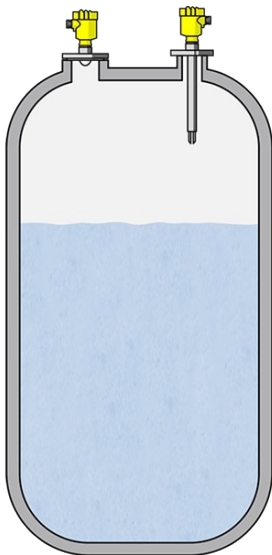

#### VEGAPULS 6X

Continuous level measurement with radar

- High chemical resistance through PTFE antenna cover
- Reliable measurement despite changing media
- Maintenance-free thanks to non-contact measurement

[Show Product](#)



#### VEGASWING 63

Vibrating level switch for point level detection

- Universally applicable as overflow and dry run protection system for virtually all liquid applications
- Media-independent switching point, reliable level information
- Highly resistant materials and coatings allow use in different media
- Test button for easy testing of instrument functionality during operation

[Show Product](#)

PRO

## VEGAPULS 6X

[Show Product](#)



**Measuring range - Distance**  
120 m

**Process temperature**  
-196 ... 450 °C

**Process pressure**  
-1 ... 160 bar

**Accuracy**  
± 1 mm

**Frequency**  
6 GHz  
26 GHz  
80 GHz

**Beam angle**  
≥ 3°

**Materials, wetted parts**  
PTFE  
PVDF  
316L  
PP  
PEEK

**Threaded connection**  
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

**Flange connection**  
≥ DN20, ≥  $\frac{3}{4}$ "

**Hygienic fittings**  
Clamp ≥ 1 $\frac{1}{2}$ " - DIN32676, ISO2852  
Slotted nut ≥ 2", DN50 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting with tension flange DN32  
hygienic fitting F40 with compression nut  
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A  
Hygienic flange connection ≥ DN50 DIN11864-2  
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A  
DRD connection ø 65 mm  
SMS 1145 DN51

PRO

## VEGASWING 63

[Show Product](#)



**Process temperature**  
-50 ... 250 °C

**Process pressure**  
-1 ... 64 bar

**Version**  
Standard  
Hygienic applications  
with gas-tight leadthrough  
with tube extension  
with temperature adapter

**Materials, wetted parts**  
PFA  
316L  
Alloy C22 (2.4602)  
Alloy 400 (2.4360)  
ECTFE  
Enamel

**Threaded connection**  
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

**Flange connection**  
≥ DN25, ≥ 1"

**Hygienic fittings**  
Clamp ≥ 1" - DIN32676, ISO2852  
Slotted nut ≥ 1 $\frac{1}{2}$ ", ≥ DN40 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting F40 with compression nut  
SMS 1145 DN51  
SMS DN38  
Hygienic fittings ≥ DN25 - DIN11864-1-A  
Hygienic flange connection DIN11864-2-A;  
DN60(ISO)ø60,3  
SMS socket piece DN38 PN6

**Seal material**  
no media contact

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

**Protection rating**  
IP66/IP67  
IP66/IP68 (1 bar)  
IP65