



Reliable

Reliable measurement despite heavy soiling

Cost effective

Maintenance-free operation thanks to non-contact instrumentation

User friendly


Secure operation under all operating conditions

Discharge chute of the belt dryer

Level measurement in the discharge chute of the belt dryer

The final, still wet pigment cake is heated on a belt dryer. At the end of the belt dryer, the dried coarse pigment powder is discharged into a silo ready for final milling and grinding into a fine powder. The feed through the belt dryer is controlled both by the flow through the chute and level in the silo.

[More details](#)

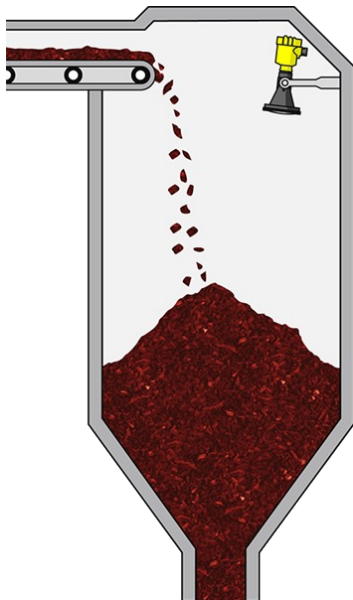

VEGAPULS 6X

Non-contact level measurement with radar for controlling the belt dryer

- Reliable measurement independent of steam, dust and buildup
- Encapsulated antenna system enables operation even in highly contaminated environment
- Simple installation even in the tightest spaces thanks to very good signal focusing

[Show Product](#)

VEGAPULS 6X[Show Product](#)**Measuring range - Distance**

120 m

Process temperature

-196 ... 450 °C

Process pressure

-1 ... 160 bar

Accuracy

± 1 mm

Frequency

6 GHz

26 GHz

80 GHz

Beam angle

≥ 3°

Materials, wetted parts

PTFE

PVDF

316L

PP

PEEK

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN20, ≥ ¾"

Hygienic fittings

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -

DIN11864-1-A

Hygienic flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-

3-A

DRD connection ø 65 mm

SMS 1145 DN51