

### Reliable

Reliable measurement independent of the process conditions

### Cost effective

Non-contact and wear-free measurement

### User friendly


Simple adjustment and operation

## Reactor

### Level measurement in a reactor

High temperatures, pressures and vacuums are techniques usually employed to make reaction processes more efficient and economical. This is a big challenge for engineering, because the sensors used have to deliver reliable measurements under these conditions. To be able to meet the diverse requirements of reaction vessels, sensors for level measurement have to meet a very wide range of application conditions.

[More details](#)

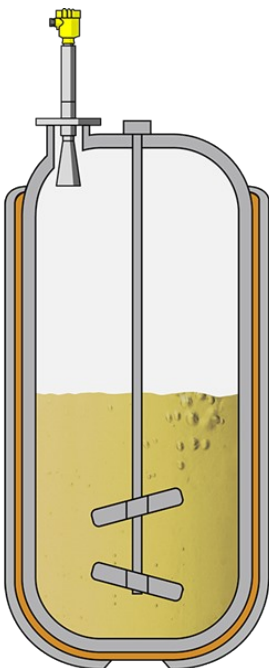

### VEGAPULS 6X

Continuous level measurement with radar in the reactor

- Trustworthy level measurement, independent of process conditions such as temperature, pressure, reaction gases or built-in agitator
- Level is reliably detected despite the effects of changing conditions or mixing processes
- Wide range of applications possible thanks to high temperature and pressure range up to +450 °C and +160 bar

[Show Product](#)

**VEGAPULS 6X**[Show Product](#)**Measuring range - Distance**

120 m

**Process temperature**

-196 ... 450 °C

**Process pressure**

-1 ... 160 bar

**Accuracy**

± 1 mm

**Frequency**

6 GHz

26 GHz

80 GHz

**Beam angle**

≥ 3°

**Materials, wetted parts**

PTFE

PVDF

316L

PP

PEEK

**Threaded connection**

≥ G¾, ≥ ¾ NPT

**Flange connection**

≥ DN20, ≥ ¾"

**Hygienic fittings**

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -

DIN11864-1-A

Hygienic flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-

3-A

DRD connection ø 65 mm

SMS 1145 DN51