



#### Reliable

Reliable measurement even during filling

#### Cost effective

Accurate measurement of the entire container volume

#### User friendly


Simple mounting and setup

## Lime silo I

### Level measurement and point level detection in the lime silo

For flue gas desulfurization a continuous production of the lime milk is required, the lime is kept on hand in sufficient quantities in large silos. Lime tends to readily adhere to more or less anything, depending on its type and consistency, interfering with equipment like the operation of instruments. A robust, non-susceptible level measurement is therefore absolutely necessary for reliable lime logistics and stocking. That's why a non-contact measuring instrument that also works well in the very dusty environment is essential here.

[More details](#)

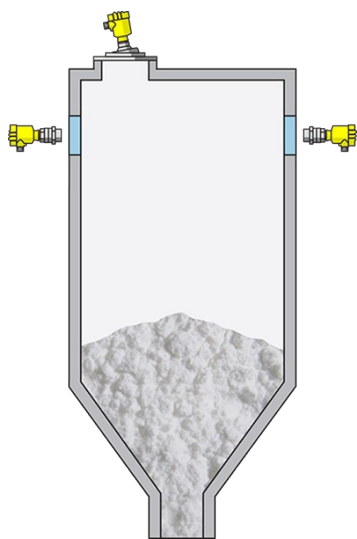

#### VEGAPULS 6X

Non-contact level measurement with radar in the lime silo

- Non-contact, maintenance-free measurement
- High measurement certainty despite extreme dust generation
- High operational reliability, even when water condenses on instrument

[Show Product](#)





#### VEGAMIP 61

Non-contact point level detection with radar in the lime silo

- Non-contact, maintenance-free measurement
- Very long service life and low maintenance requirements through robust design
- Simple measurement from outside the container

[Show Product](#)

PRO	PRO
<b>VEGAPULS 6X</b> <a href="#">Show Product</a>	<b>VEGAMIP 61</b> <a href="#">Show Product</a>
	
<b>Measuring range - Distance</b> 120 m	<b>Measuring range - Distance</b> 100 m
<b>Process temperature</b> -196 ... 450 °C	<b>Process temperature</b> -40 ... 80 °C
<b>Process pressure</b> -1 ... 160 bar	<b>Process pressure</b> -1 ... 4 bar
<b>Accuracy</b> ± 1 mm	<b>Version</b> hygienically encapsulated horn antenna for separate horn antenna with horn antenna ø 40 mm with horn antenna ø 48 mm with horn antenna ø 75 mm with horn antenna ø 95 mm with plastic horn antenna ø 80 mm Horn antenna ø 1½" with encapsulated horn antenna
<b>Frequency</b> 6 GHz 26 GHz 80 GHz	
<b>Beam angle</b> ≥ 3°	
<b>Materials, wetted parts</b> PTFE PVDF 316L PP PEEK	<b>Materials, wetted parts</b> PTFE 316L 1.4848 PP
<b>Threaded connection</b> ≥ G¾, ≥ ¾ NPT	<b>Threaded connection</b> G1½, 1½ NPT
<b>Flange connection</b> ≥ DN20, ≥ ¾"	<b>Flange connection</b> ≥ DN50, ≥ 2"
<b>Hygienic fittings</b> Clamp ≥ 1½" - DIN32676, ISO2852 Slotted nut ≥ 2", DN50 - DIN 11851 Varivent ≥ DN25 hygienic fitting with tension flange DN32 hygienic fitting F40 with compression nut Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A Hygienic flange connection ≥ DN50 DIN11864-2 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A DRD connection ø 65 mm SMS 1145 DN51	<b>Hygienic fittings</b> Slotted nut ≥ 2", DN50 - DIN 11851 Varivent ≥ DN25 DRD connection ø 65 mm for NEUMO BioControl D50 PN16 / 316L
	<b>Seal material</b> FKM FFKM
	<b>Housing material</b> Plastic Aluminium Stainless steel (precision casting) Stainless steel (electropolished)