



Reliable

Reliable readings in spite of difficult measuring conditions

Cost effective

Maintenance costs removed by air cleaning of antenna

User friendly


One radar sensor for all silo sizes, simple to install

Ash silo

Level measurement and point level detection in the ash silo

Large quantities of fibre waste are produced during paper production. These are dried and burned and the energy released during combustion is used as process heat or to generate electricity. The ash is stored in high silos to be later used as an additive in the building materials industry. When the ash silo is filled, a great amount of noise and dust is generated and the material forms large angles of repose and overhangs. Filling, emptying and transportation logistics are controlled through the level measurement system.

[More details](#)

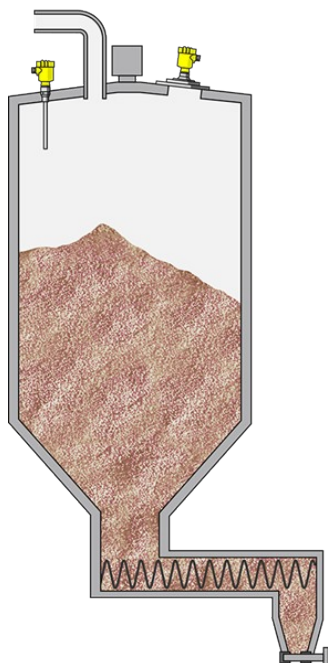

VEGAPULS 6X

Radar level measurement for controlling the filling and emptying process in the ash silo

- Reliable measurement under difficult process conditions
- Easy alignment of the sensor with swivel mount and sensor app
- Good focusing allows retrofitting of sensor at any position

[Show Product](#)



VEGACAP 64

Capacitive point level detection for overflow protection

- Reliable switching signals even under difficult process conditions
- Function unaffected by buildup
- Long service life thanks to robust construction

[Show Product](#)

PRO

VEGAPULS 6X

[Show Product](#)



Measuring range - Distance
120 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 1 mm

Frequency
6 GHz
26 GHz
80 GHz

Beam angle
≥ 3°

Materials, wetted parts
PTFE
PVDF
316L
PP
PEEK

Threaded connection
≥ G $\frac{3}{4}$, ≥ $\frac{3}{4}$ NPT

Flange connection
≥ DN20, ≥ $\frac{3}{4}$ "

Hygienic fittings
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 2", DN50 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienic screw connections ≥ DN50 tube ø53 -
DIN11864-1-A
Hygienic flange connection ≥ DN50 DIN11864-2
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-
3-A
DRD connection ø 65 mm
SMS 1145 DN51

PRO

VEGACAP 64

[Show Product](#)



Measuring range - Distance
-

Process temperature
-50 ... 200 °C

Process pressure
-1 ... 64 bar

Version
PTFE insulation

Materials, wetted parts
PTFE
316L
Alloy C22 (2.4602)
Steel C22.8

Threaded connection
≥ G $\frac{3}{4}$, ≥ $\frac{3}{4}$ NPT

Flange connection
≥ DN25, ≥ 1"

Seal material
no media contact

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP68 (0,2 bar)
IP66/IP67
IP66/IP68 (1 bar)