



### Reliable

High measurement certainty without mechanical wear

### Cost effective

Optimal information on the available gas quantity

### User friendly

Maintenance-free, reliable operation of the facility

## Biogas storage facility

### Volume and pressure monitoring in the biogas storage facility

The methane gas extracted from the digestion tank is temporarily stored in a gas reservoir. Depending on the design of the gas storage facility, either a flexible diaphragm of plastic or a floating roof is used for volume equalization. The gas volume and gas pressure are measured continuously to ensure reliable and safe operation.

#### More details



### VEGAPULS 6X

Continuous level measurement with radar for permanent gas volume measurement

- Reliable, maintenance-free measurement
- Independent of environmental influences
- Easy integration into existing gas storage facilities
- Wireless operation via Bluetooth with smartphone, tablet or PC

#### Show Product



### VEGABAR 82

Monitoring of the gas pressure in the gas reservoir

- High measuring accuracy through use of finely graduated measuring cells
- Robust sensor construction for high availability
- Long-term stability of the ceramic measuring cell ensures maintenance-free operation

#### Show Product




### VEGATRENN 141

Separator for the optimum supply of power to the connected sensors

- On-site diagnostics for direct display of status via LEDs
- Simple parametrization interface using the HART sockets for user-friendly operation
- Galvanic separation of sensors and PLC is secured

#### Show Product

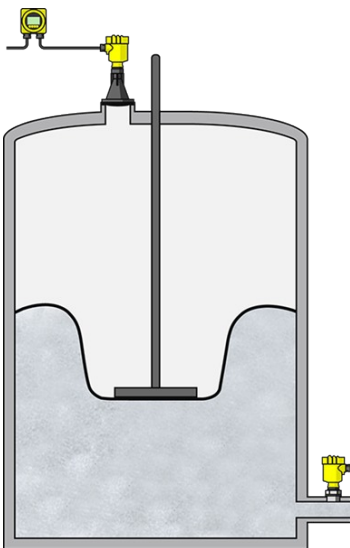

PRO

### VEGAPULS 6X

[Show Product](#)



**Measuring range - Distance**  
120 m

**Process temperature**  
-196 ... 450 °C

**Process pressure**  
-1 ... 160 bar

**Accuracy**  
± 1 mm

**Frequency**  
6 GHz  
26 GHz  
80 GHz

**Beam angle**  
≥ 3°

**Materials, wetted parts**  
PTFE  
PVDF  
316L  
PP  
PEEK

**Threaded connection**  
≥ G¾, ≥ ¾ NPT

**Flange connection**  
≥ DN20, ≥ ¾"

**Hygienic fittings**  
Clamp ≥ 1½" - DIN32676, ISO2852  
Slotted nut ≥ 2", DN50 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting with tension flange DN32  
hygienic fitting F40 with compression nut  
Hygienic screw connections ≥ DN50 tube ø53 - DIN11864-1-A  
Hygienic flange connection ≥ DN50 DIN11864-2  
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A  
DRD connection ø 65 mm  
SMS 1145 DN51

PRO

### VEGABAR 82

[Show Product](#)



**Measuring range - Distance**  
-

**Measuring range - Pressure**  
-1 ... 100 bar

**Process temperature**  
-40 ... 150 °C

**Process pressure**  
-1 ... 100 bar

**Accuracy**  
0.05 %

**Materials, wetted parts**  
PVDF  
316L  
Alloy C22 (2.4602)  
PP  
1.4057  
1.4410  
Alloy C276 (2.4819)  
Duplex (1.4462)  
Titanium Grade 2 (3.7035)

**Threaded connection**  
≥ G½, ≥ ½ NPT

**Flange connection**  
≥ DN15, ≥ ½"

**Hygienic fittings**  
Clamp ≥ 1" - DIN32676, ISO2852  
Slotted nut ≥ DN25 - DIN 11851  
hygienic fitting with tension flange DN32  
hygienic fitting F40 with compression nut  
DRD connection ø 65 mm  
SMS 1145 DN51  
SMS DN38  
Swagelok VCR screwing  
Varivent G125  
Varivent N50-40  
for NEUMO BioControl D50 PN16 / 316L

**Seal material**  
EPDM  
FKM  
FFKM

### VEGATRENN 141

[Show Product](#)



**Protection rating**  
IP20

**Input**  
1 x 4 ... 20 mA/HART sensor input

**Output**  
1 x 4 ... 20 mA

**Ambient temperature**  
-20 ... 60 °C