



Reliable

Reliable measurement under rough conditions

Cost effective

Maintenance-free operation despite the presence of abrasive and adhesive products

User friendly


Simple installation and setup

Storage tank for solid raw materials

Level measurement and point level detection in the storage tank for solid raw materials

The solid raw materials such as gravel, clay, barite, cement and binders are essential for creating the different properties of the drilling mud. These materials are stored for mud production in storage tanks. To ensure optimal storage, reliable level measurement and point level detection are required.

[More details](#)

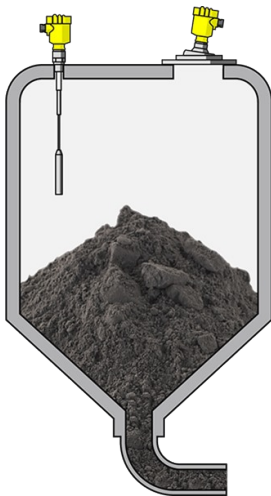

VEGAPULS 69

Level measurement with radar in the storage tank for solid raw materials

- Swivelling holder allows optimal sensor alignment
- High equipment availability, as wear and maintenance-free
- Reliable measurement, unaffected by dust and noise

[Show Product](#)



VEGACAP 65

Capacitive level switch prevents overfilling in the storage tank for solid raw materials

- Robust design ensures a long service life
- SIL2 qualification increases plant safety
- Easy on-site customization thanks to shortenable cable probe

[Show Product](#)

PRO

PRO

VEGAPULS 69

[Show Product](#)



Measuring range - Distance
120 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 1 mm

Frequency
6 GHz
26 GHz
80 GHz

Beam angle
≥ 3°

Materials, wetted parts
PTFE
PVDF
316L
PP
PEEK

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN20, ≥ ¾"

Hygienic fittings
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 2", DN50 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienic screw connections ≥ DN50 tube ø53 -
DIN11864-1-A
Hygienic flange connection ≥ DN50 DIN11864-2
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-
3-A
DRD connection ø 65 mm
SMS 1145 DN51

VEGACAP 65

[Show Product](#)



Measuring range - Distance
-

Process temperature
-50 ... 200 °C

Process pressure
-1 ... 64 bar

Version
Cable ø 6 mm with screening tube without weight
Cable ø 6 mm with screening tube and gravity weight
Cable ø 6 mm with gravity weight
Cable ø 8 mm with abrasion protection without weight
Cable ø 8 mm with abrasion protection and gravity weight
Cable ø 8 mm with gravity weight
PA cable ø 12 mm with screening tube and gravity weight

Materials, wetted parts
PTFE
316L
PA
PEEK
Steel

Threaded connection
≥ G1, ≥ 1 NPT

Flange connection
≥ DN50, ≥ 2"

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP68 (0,2 bar)
IP66/IP67
IP66/IP68 (1 bar)

Output
Relay (DPDT)
Contactless electronic switch
Transistor (NPN/PNP)
Two-wire