

#### Reliable

Reliable, service-proven technology

#### Cost effective

Minimal costs for maintenance and servicing

#### User friendly


Simple setup and commissioning

## Adipic acid mixing tank

### Level measurement and point level detection in adipic acid mixing tank

Adding adipic acid to the lime milk increases the effectiveness of the desulfurization process in the absorber. This is done by mixing adipic powder with water in the mixing tank. This acid lowers operating costs because it reduces the amount of lime milk required. Various measurement systems ensure optimal control of the mixing ratio.

[More details](#)

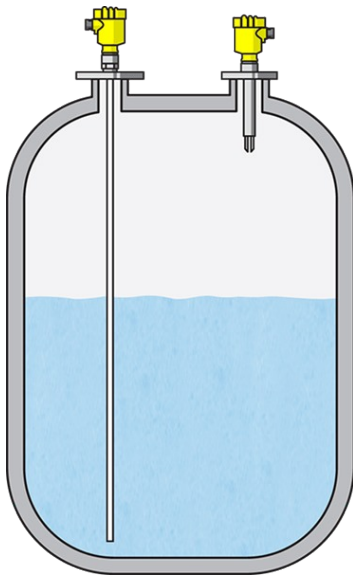

#### VEGACAL 63

The capacitive level sensor monitors the level in the mixing vessel

- High chemical resistance with PTFE coating
- Long service life, low maintenance requirements
- Cost savings through simple installation and robust construction
- Measurement over the entire probe length, includes SIL2 approval

[Show Product](#)



#### VEGASWING 63

The coated vibrating level switch reliably prevents tank overfilling

- Product-independent switching point ensures millimetre-exact detection of the limit level
- Minimal costs for maintenance and servicing
- Available in various materials, includes Ex, WHG and SIL2 approval

[Show Product](#)

PRO

### VEGACAL 63

[Show Product](#)



**Measuring range - Distance**  
6 m

**Process temperature**  
-50 ... 200 °C

**Process pressure**  
-1 ... 64 bar

**Version**  
PE insulation  
PE insulation and concentric tube  
PTFE insulation  
PTFE insulation with screening tube PN1  
PTFE insulation with screening tube PN16  
PTFE insulation with screening tube PN40  
PTFE insulation and concentric tube

**Materials, wetted parts**  
PTFE  
316L  
Alloy C22 (2.4602)  
Alloy 400 (2.4360)  
PE  
Steel C22.8

**Threaded connection**  
≥ G $\frac{1}{2}$ , ≥  $\frac{1}{2}$  NPT

**Flange connection**  
≥ DN25, ≥ 1"

**Seal material**  
no media contact

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

**Protection rating**  
IP66/IP68 (0,2 bar)  
IP66/IP67  
IP66/IP68 (1 bar)

PRO

### VEGASWING 63

[Show Product](#)



**Process temperature**  
-50 ... 250 °C

**Process pressure**  
-1 ... 64 bar

**Version**  
Standard  
Hygienic applications  
with gas-tight leadthrough  
with tube extension  
with temperature adapter

**Materials, wetted parts**  
PFA  
316L  
Alloy C22 (2.4602)  
Alloy 400 (2.4360)  
ECTFE  
Enamel

**Threaded connection**  
≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT

**Flange connection**  
≥ DN25, ≥ 1"

**Hygienic fittings**  
Clamp ≥ 1" - DIN32676, ISO2852  
Slotted nut ≥ 1 $\frac{1}{2}$ ", ≥ DN40 - DIN 11851  
Varivent ≥ DN25  
hygienic fitting F40 with compression nut  
SMS 1145 DN51  
SMS DN38  
Hygienic fittings ≥ DN25 - DIN11864-1-A  
Hygienic flange connection DIN11864-2-A;  
DN60(ISO)ø60,3  
SMS socket piece DN38 PN6

**Seal material**  
no media contact

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

**Protection rating**  
IP66/IP67  
IP66/IP68 (1 bar)  
IP65