



Reliable

Optimal utilisation of the fish scraps through reliable measurement

Cost effective

Fast, reliable cleaning thanks to front-flush design

User friendly


No adjustment required

Intermediate tank for fish waste treatment

Point level monitoring in the intermediate tank

Since the fish scraps left over from filleting still contain a lot of usable substances, they are processed further. To enable simple, mechanical processing, these leftovers are pre-processed for the mill and stored in an intermediate tank. Depending on the feedstock, different consistencies can form in this tank. Reliable point level detection prevents overflowing or dry run.

[More details](#)

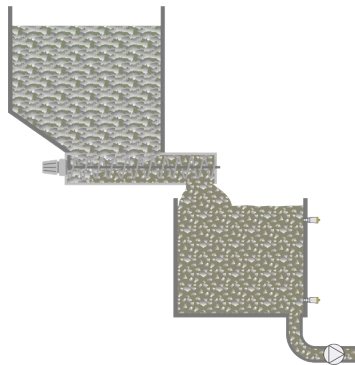

VEGAPOINT 24

Capacitive level switch as overflow and dry run protection in the intermediate storage tank

- Easy installation without adjustment
- No buildup of medium due to front-flush installation
- Fast, easy cleaning thanks to front-flush design
- 360° status display for quick and easy recognition of switching status

[Show Product](#)



Welded socket VEGAPOINT

Welded socket for the tank for front-flush installation

- Can be welded directly into the tank, no further accessories necessary
- Maintenance-free sealing concept

[Show Product](#)

VEGAPOINT 24
[Show Product](#)

Measuring range - Distance

-

Process temperature

-40 ... 115 °C

Process pressure

-1 ... 64 bar

Materials, wetted parts
316L
PEEK
Threaded connection

G½

Hygienic fittings
Clamp ≥ 2" - DIN32676, ISO2852
Clamp ≥ 1" - DIN32676, ISO2852
Clamp ≥ 1½" - DIN32676, ISO2852
Protection rating
IP66/IP67
IP69
Output
Transistor (NPN/PNP)
IO-Link
Ambient temperature

-40 ... 70 °C

Welded socket VEGAPOINT
[Show Product](#)
