



### Reliable

Reliable under all operating conditions

### Cost effective

Maintenance-free operation in the plant

### User friendly


Simple mounting and setup

## Belt transfer station

### Level measurement at the belt transfer station

In a coal power plant, either hard coal or brown coal is burned as the main fuel source. The coal is transported on conveyor belts to the furnace. To avoid backup or overfilling at the belt transfer stations, level controls are necessary. Because only a reliable level measurement at these belt transfer stations can ensure uninterrupted feeding of the furnaces with coal. Additional point level detectors are installed to prevent overfilling.

[More details](#)

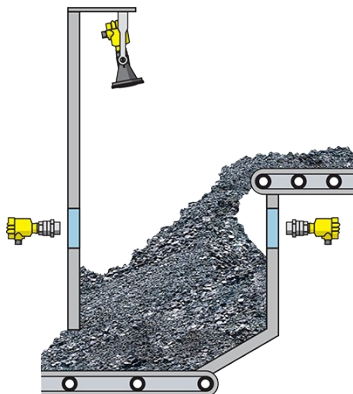

### VEGAPULS 6X

The radar sensor monitors the belt transfer station and ensures an uninterrupted feed into the coal bunker

- Non-contact, maintenance-free measurement
- High measurement certainty despite extreme dust generation
- High operational reliability ensured through noise immunity

[Show Product](#)



### VEGAMIP 61

Point level detection prevents backup at the transfer station

- Non-contact, maintenance-free measurement
- Very long service life and low maintenance requirements through robust design
- Dependable switching point

[Show Product](#)

PRO

PRO

**VEGAPULS 6X**[Show Product](#)**Measuring range - Distance**

120 m

**Process temperature**

-196 ... 450 °C

**Process pressure**

-1 ... 160 bar

**Accuracy**

± 1 mm

**Frequency**

6 GHz

26 GHz

80 GHz

**Beam angle**

≥ 3°

**Materials, wetted parts**

PTFE

PVDF

316L

PP

PEEK

**Threaded connection**

≥ G¾, ≥ ¾ NPT

**Flange connection**

≥ DN20, ≥ ¾"

**Hygienic fittings**

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -  
DIN11864-1-A

Hygienic flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-  
3-A

DRD connection ø 65 mm

SMS 1145 DN51

**VEGAMIP 61**[Show Product](#)**Measuring range - Distance**

100 m

**Process temperature**

-40 ... 80 °C

**Process pressure**

-1 ... 4 bar

**Version**

hygienically encapsulated horn antenna

for separate horn antenna

with horn antenna ø 40 mm

with horn antenna ø 48 mm

with horn antenna ø 75 mm

with horn antenna ø 95 mm

with plastic horn antenna ø 80 mm

Horn antenna ø 1½"

with encapsulated horn antenna

**Materials, wetted parts**

PTFE

316L

1.4848

PP

**Threaded connection**

G1½, 1½ NPT

**Flange connection**

≥ DN50, ≥ 2"

**Hygienic fittings**

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

DRD connection ø 65 mm

for NEUMO BioControl D50 PN16 / 316L

**Seal material**

FKM

FFKM

**Housing material**

Plastic

Aluminium

Stainless steel (precision casting)

Stainless steel (electropolished)