



Reliable

Reliable under all operating conditions

Cost effective

Maintenance-free operation in the plant

User friendly


Simple mounting and setup

Belt transfer station

Level measurement at the belt transfer station

In a coal power plant, either hard coal or brown coal is burned as the main fuel source. The coal is transported on conveyor belts to the furnace. To avoid backup or overfilling at the belt transfer stations, level controls are necessary. Because only a reliable level measurement at these belt transfer stations can ensure uninterrupted feeding of the furnaces with coal. Additional point level detectors are installed to prevent overfilling.

[More details](#)

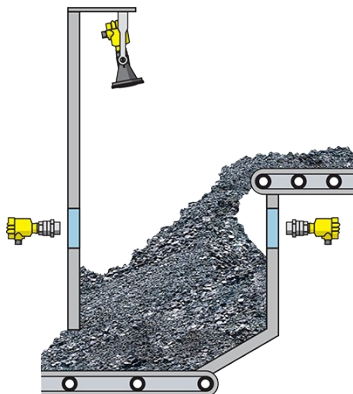

VEGAPULS 6X

The radar sensor monitors the belt transfer station and ensures an uninterrupted feed into the coal bunker

- Non-contact, maintenance-free measurement
- High measurement certainty despite extreme dust generation
- High operational reliability ensured through noise immunity

[Show Product](#)



VEGAMIP 61

Point level detection prevents backup at the transfer station

- Non-contact, maintenance-free measurement
- Very long service life and low maintenance requirements through robust design
- Dependable switching point

[Show Product](#)

PRO

PRO

VEGAPULS 6X[Show Product](#)**Measuring range - Distance**

120 m

Process temperature

-196 ... 450 °C

Process pressure

-1 ... 160 bar

Accuracy

± 1 mm

Frequency

6 GHz

26 GHz

80 GHz

Beam angle

≥ 3°

Materials, wetted parts

PTFE

PVDF

316L

PP

PEEK

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN20, ≥ ¾"

Hygienic fittings

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -

DIN11864-1-A

Hygienic flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-

3-A

DRD connection ø 65 mm

SMS 1145 DN51

VEGAMIP 61[Show Product](#)**Measuring range - Distance**

100 m

Process temperature

-40 ... 80 °C

Process pressure

-1 ... 4 bar

Version

hygienically encapsulated horn antenna

for separate horn antenna

with horn antenna ø 40 mm

with horn antenna ø 48 mm

with horn antenna ø 75 mm

with horn antenna ø 95 mm

with plastic horn antenna ø 80 mm

Horn antenna ø 1½"

with encapsulated horn antenna

Materials, wetted parts

PTFE

316L

1.4848

PP

Threaded connection

G1½, 1½ NPT

Flange connection

≥ DN50, ≥ 2"

Hygienic fittings

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

DRD connection ø 65 mm

for NEUMO BioControl D50 PN16 / 316L

Seal material

FKM

FFKM

Housing material

Plastic

Aluminium

Stainless steel (precision casting)

Stainless steel (electropolished)