



#### Reliable

Reliable measurement solution for adhesive media

#### Cost effective

Accurate measurement of the tank contents, regardless of medium and degree of contamination

#### User friendly


Maintenance-free and reliable operation

## Cargo tank in a bitumen tanker

### Level measurement and point level detection in the cargo tanks of a bitumen tanker

Bitumen is transported at temperatures of around 170 °C to 190 °C. The heating is supplied via an array of multi-layered heating tubes mounted on the floor and sides of the tanks. To ensure efficient utilisation of the tanks as well as a safe ship attitude, the levels in the bitumen tanks require accurate monitoring, particularly during loading and unloading.

[More details](#)

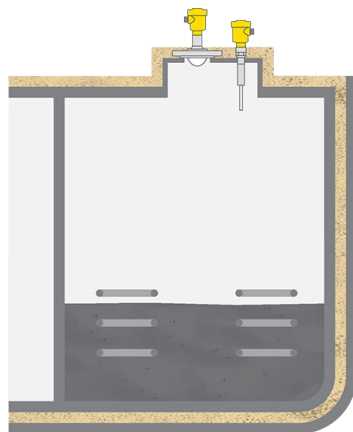

#### VEGACAP 64

Capacitive point level detection for overfill protection in the bitumen tank

- Proven, robust measuring principle, unaffected by high temperatures and buildup
- Reliable switch point allows optimum utilization of the tank volume

[Show Product](#)



#### VEGAPULS 6X

Radar sensor for non-contact level measurement in the bitumen tank

- Ideal for hot and adhesive media thanks to contactless measuring principle
- Front-flush antenna delivers precise measurement data even with heavy buildup
- High accuracy in all measuring situations
- Reliable measurement down to the bottom, even in difficult installation conditions thanks to the good focusing of 80 GHz technology

[Show Product](#)

PRO

**VEGACAP 64**  
[Show Product](#)

**Measuring range - Distance**

-

**Process temperature**

-50 ... 200 °C

**Process pressure**

-1 ... 64 bar

**Version**

PTFE insulation

**Materials, wetted parts**

PTFE  
 316L  
 Alloy C22 (2.4602)  
 Steel C22.8

**Threaded connection**

≥ G¾, ≥ ¾ NPT

**Flange connection**

≥ DN25, ≥ 1"

**Seal material**

no media contact

**Housing material**

Plastic  
 Aluminium  
 Stainless steel (precision casting)  
 Stainless steel (electropolished)

**Protection rating**

IP66/IP68 (0,2 bar)  
 IP66/IP67  
 IP66/IP68 (1 bar)

PRO

**VEGAPULS 6X**  
[Show Product](#)

**Measuring range - Distance**

120 m

**Process temperature**

-196 ... 450 °C

**Process pressure**

-1 ... 160 bar

**Accuracy**

± 1 mm

**Frequency**

6 GHz  
 26 GHz  
 80 GHz

**Beam angle**

≥ 3°

**Materials, wetted parts**

PTFE  
 PVDF  
 316L  
 PP  
 PEEK

**Threaded connection**

≥ G¾, ≥ ¾ NPT

**Flange connection**

≥ DN20, ≥ ¾"

**Hygienic fittings**

Clamp ≥ 1½" - DIN32676, ISO2852  
 Slotted nut ≥ 2", DN50 - DIN 11851  
 Varivent ≥ DN25  
 hygienic fitting with tension flange DN32  
 hygienic fitting F40 with compression nut  
 Hygienic screw connections ≥ DN50 tube ø53 -  
 DIN11864-1-A  
 Hygienic flange connection ≥ DN50 DIN11864-2  
 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-  
 3-A  
 DRD connection ø 65 mm  
 SMS 1145 DN51