



Reliable

Reliable measurement and control of the pumps

Cost effective

Maintenance-free operation and non-contact measurement technology

User friendly


Reliable function under all operating conditions

Sewage screw lifting station

Level measurement in the sewage lifting station

The heavily soiled, greasy wastewater from households and commercial enterprises flows into the sewage lifting station. The dirty water and floating debris contained therein are raised to a higher level with screw pumps and then flow into the treatment plant along a natural downward gradient. Level measurement in the inlet shaft controls the cost-effective use of the pumps.

[More details](#)

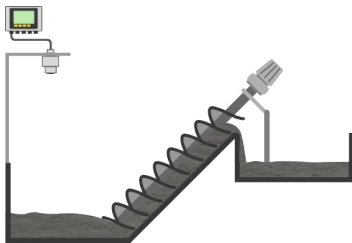

VEGAPULS C 21

Level measurement with radar in the inlet shaft

- Maintenance-free operation through non-contact 80 GHz radar technology
- Simple mounting reduces installation and setup costs
- Secure wireless operation via Bluetooth with smartphone, tablet or PC

[Show Product](#)



VEGAMET 861

Controller and display instrument for pump control

- Universal controller for simple pump control
- Fast setup and commissioning thanks to simple menu navigation and application wizards

[Show Product](#)

VEGAPULS C 21[Show Product](#)**Measuring range - Distance**

15 m

Process temperature

-40 ... 80 °C

Process pressure

-1 ... 3 bar

Accuracy

± 2 mm

Frequency

80 GHz

Beam angle

8°

Materials, wetted parts

PVDF

Threaded connection

G1½ / G1, 1½ NPT / 1 NPT, R1½ / R1

Seal material

FKM

Protection rating

IP66/IP68 (3 bar), Type 6P

VEGAMET 861[Show Product](#)**Protection rating**

IP66/IP67, Type 4X

Input1 x 4 ... 20 mA/HART sensor input
2x digital input**Output**1 x 0/4 ... 20 mA current output
1x failure relay (instead of operating relay)
4x operating relay**Ambient temperature**

-40 ... 60 °C

Measured value memoryInternally
SD card