



#### Reliable

Highly accurate measured values, precise control input for the headbox pump

#### Cost effective

No flushing pipes needed

#### User friendly


High protection class IP 68 for easy cleaning

## Headbox

### Pressure measurement in the headbox

The paper suspension is pumped into the headbox of the paper machine. Via the hydraulically pressurized headbox it passes through a tapered cross-flow distributor and manifold, through the rectangular discharge opening, or slice, onto the screen. The outflow speed of the suspension is adjusted to match the speed of the screen by adjusting the pressure of the headbox feed pump. This means an accurate pressure measurement, with minimal turbulence created in the headbox is vital at this part of the process.

[More details](#)

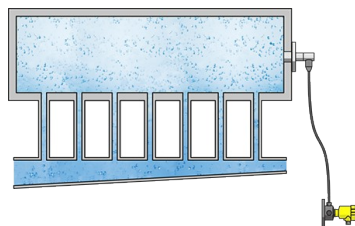

### VEGABAR 82

Process pressure measurement in the headbox for speed control of the stock pump

- Absolutely front-flush installation in the wall of the headbox
- No effect on the application of slurry to the sieve
- CERTEC® measuring cell guarantees a high accuracy

[Show Product](#)

## VEGABAR 82

[Show Product](#)**Measuring range - Distance**

-

**Measuring range - Pressure**

-1 ... 100 bar

**Process temperature**

-40 ... 150 °C

**Process pressure**

-1 ... 100 bar

**Accuracy**

0.05 %

**Materials, wetted parts**

PVDF

316L

Alloy C22 (2.4602)

PP

1.4057

1.4410

Alloy C276 (2.4819)

Duplex (1.4462)

Titanium Grade 2 (3.7035)

**Threaded connection**

≥ G½, ≥ ½ NPT

**Flange connection**

≥ DN15, ≥ ½"

**Hygienic fittings**

Clamp ≥ 1" - DIN32676, ISO2852

Slotted nut ≥ DN25 - DIN 11851

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

DRD connection ø 65 mm

SMS 1145 DN51

SMS DN38

Swagelok VCR screwing

Varivent G125

Varivent N50-40

for NEUMO BioControl D50 PN16 / 316L

**Seal material**

EPDM

FKM

FFKM