



Reliable

Overfill protection increases plant safety

Cost effective

Low maintenance costs, because non-moving parts

User friendly


Unaffected by process conditions

Deethanizer

Level measurement and point level detection in the deethanizer

Accurate level control of the deethanizer ensures product quality of the obtained hydrocarbons, but this is made difficult due to hot liquids flashing, buildup and high temperature. Even through quick process changes reliable level measurement and point level detection are required to ensure a smooth operation of the plant.

[More details](#)

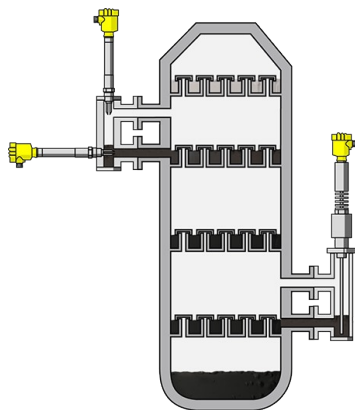

VEGAFLEX 86

Level measurement with guided wave radar in the deethanizer

- Non-moving parts are immune to mechanical failure
- Low maintenance requirements reduce downtime and costs
- Certain measurement even by changing process conditions

[Show Product](#)



VEGASWING 66

Vibrating level switch for monitoring high and low alarm in the deethanizer

- Reliable measurement unaffected by high temperature and pressure
- Test function during operation provides higher plant availability
- Redundancy increases plant safety and availability

[Show Product](#)

PRO

PRO

VEGAFLEX 86

[Show Product](#)



VEGASWING 66

[Show Product](#)



Measuring range - Distance
75 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 400 bar

Accuracy
± 2 mm

Version
Coax version ø 21.3 mm with multiple hole
Coax version ø 42.2 mm with single hole
Coax version ø 42.2 mm with multiple hole
Exchangeable rod ø 16 mm
Exchangeable cable ø 2 mm with gravity weight
Exchangeable cable ø 4 mm with gravity weight
Exchangeable cable ø 2 mm with centering weight
Exchangeable cable ø 4 mm with centering weight

Materials, wetted parts
316L
Alloy C22 (2.4602)
316

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN25, ≥ 1"

Seal material
FFKM
graphit and ceramic

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Version
Compact version
with gas-tight leadthrough
with tube extension

Materials, wetted parts
316L
Alloy C22 (2.4602)
Inconel 718

Threaded connection
G1, 1 NPT, R1

Flange connection
≥ DN50, ≥ 2"

Seal material
no media contact

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP67
IP66/IP68 (1 bar)
IP65

Output
Relay (DPDT)
Transistor (NPN/PNP)
Two-wire