



Reliable

Reliable measurement through automatic measurement correction

Cost effective

Optimal operation of the facility

User friendly


Simple mounting and setup

Steam drum

Level measurement and point level detection in the steam drum

Process heat in a power plant is provided by steam at different pressures. The required process temperature is regulated via the steam pressure. Depending on the process temperatures there can be pressures up to 160 bar, at temperatures up to 400 °C in the steam drums. Reliable control of water levels and fail safe limit of high and low water in the steam vessels are crucial for the safe operation of the plant.

[More details](#)

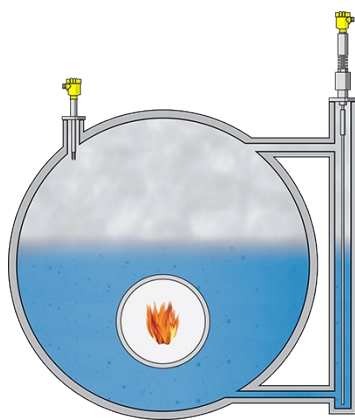

VEGAFLEX 86

Precise, continuous measured values in saturated steam with guided radar

- High plant safety via self-monitoring in extreme process temperatures and pressures
- Reliable measured values through automatic measurement correction (integrated steam compensation)
- Safe for use up to SIL2/3 according to IEC 61508

[Show Product](#)



VEGASWING 66

The vibrating level switch is used in the steam drum as a high and low water limiting device

- High security through self-monitoring of sensor element and electronics at high process temperatures and pressures
- Fast and reliable function test via the press of a button
- Flexible and trustworthy in applications up to SIL3

[Show Product](#)

PRO

VEGAFLEX 86

[Show Product](#)



Measuring range - Distance
75 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 400 bar

Accuracy
± 2 mm

Version
Coax version ø 21.3 mm with multiple hole
Coax version ø 42.2 mm with single hole
Coax version ø 42.2 mm with multiple hole
Exchangeable rod ø 16 mm
Exchangeable cable ø 2 mm with gravity weight
Exchangeable cable ø 4 mm with gravity weight
Exchangeable cable ø 2 mm with centering weight
Exchangeable cable ø 4 mm with centering weight

Materials, wetted parts
316L
Alloy C22 (2.4602)
316

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN25, ≥ 1"

Seal material
FFKM
graphit and ceramic

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

PRO

VEGASWING 66

[Show Product](#)



Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Version
Compact version
with gas-tight leadthrough
with tube extension

Materials, wetted parts
316L
Alloy C22 (2.4602)
Inconel 718

Threaded connection
G1, 1 NPT, R1

Flange connection
≥ DN50, ≥ 2"

Seal material
no media contact

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP67
IP66/IP68 (1 bar)
IP65

Output
Relay (DPDT)
Transistor (NPN/PNP)
Two-wire