



Reliable

Reliable control of the cleaning cycle in sand traps

Cost effective

Targeted cleaning depending on the amount of sand deposits

User friendly



Simple installation and maintenance-free operation

Grit trap

Point level detection in a grit trap

Through circulation and aeration of the wastewater, mineral substances such as grit and sand settle to the bottom of the settling basin. Point level detection of settled sand under water prevents equipment malfunction and damage and controls the cleaning cycle in the grit trap.

[More details](#)

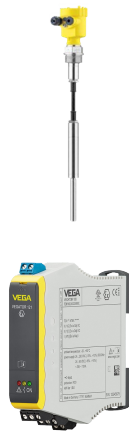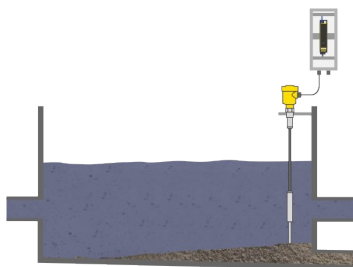

VEGA 62

Level detection of settled grit under water

- Reliable function through product-independent switching point
- Wear and maintenance free operation
- Freely moving sensor element and highly durable suspension cable

[Show Product](#)

VEGATOR 121

Single channel controller for level detection

- Comprehensive monitoring detects short-circuit and line break of the measuring cable and interferences in the sensor
- Simple and comfortable SIL and WHG function test by means of test key
- Simple installation through carrier rail mounting as well as detachable, coded terminals

[Show Product](#)

VEGAVIB 62
[Show Product](#)



Process temperature
 -40 ... 150 °C

Process pressure
 -1 ... 6 bar

Version
 Detection of solids in water
 Suspension cable

Materials, wetted parts
 316L
 FEP
 PUR

Threaded connection
 $\geq G1, \geq 1 \text{ NPT}$

Flange connection
 $\geq DN 32, \geq 1\frac{1}{2}"$

Seal material
 CR, CSM

Housing material
 Plastic
 Aluminium
 Stainless steel (precision casting)
 Stainless steel (electropolished)

Protection rating
 IP66/IP68 (0,2 bar)
 IP66/IP67
 IP66/IP68 (1 bar)

Output
 Relay (DPDT)
 Contactless electronic switch
 Transistor (NPN/PNP)
 Two-wire
 NAMUR

VEGATOR 121
[Show Product](#)



Protection rating
 IP20

Input
 1 x sensor input two-wire 8/16 mA

Output
 1 x operating relay (SPDT)
 Optionally 1 x fail safe relay output (SPDT)

Ambient temperature
 -20 ... 60 °C

Signal input (specify)
 Two-wire 8/16 mA

Signal output (specify)
 Operating relay
 Fail safe relay