



Reliable

Reliable, millimetre-exact detection of the sea level

Cost effective

No maintenance or cleaning required

User friendly


Simple installation, easy access to the measuring point at any time

Tsunami warning system in the harbour

Sea level measurement at the harbour wall

Tsunamis travel quickly and cause great damage when they hit land. So it is vital that tsunami warnings are issued early. Tsunami information centres continuously evaluate simultaneous data from seismic and sea level measuring stations. Such a sea level measuring station is operated by an oceanographic centre in a ferry and cargo-ship terminal. The measurement has to reliably and accurately detect the sea level and forward the data directly to the central monitoring system.

[More details](#)

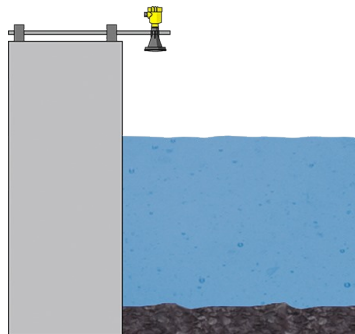

VEGAPULS 6X

Sea level measurement with radar at the harbour wall

- Contactless and maintenance-free
- Precision focusing of the measurement signal allows mounting close to the harbour wall
- Reliable function, independent of weather and sea conditions

[Show Product](#)

VEGAPULS 6X[Show Product](#)**Measuring range - Distance**

120 m

Process temperature

-196 ... 450 °C

Process pressure

-1 ... 160 bar

Accuracy

± 1 mm

Frequency

6 GHz

26 GHz

80 GHz

Beam angle

≥ 3°

Materials, wetted parts

PTFE

PVDF

316L

PP

PEEK

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN20, ≥ ¾"

Hygienic fittings

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -

DIN11864-1-A

Hygienic flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-

3-A

DRD connection ø 65 mm

SMS 1145 DN51