



#### Reliable

Overfill protection increases plant safety

#### Cost effective

Low maintenance costs, because non-moving parts

#### User friendly


Unaffected by process conditions

## Depropanizer

### Level measurement and point level detection in the depropanizer

Accurate level control of the depropanizer ensures product quality of the obtained hydrocarbons, but this is made difficult due to hot liquids flashing, buildup and high temperature. Even through quick process changes reliable level measurement and point level detection are required to ensure a smooth operation of the plant.

[More details](#)

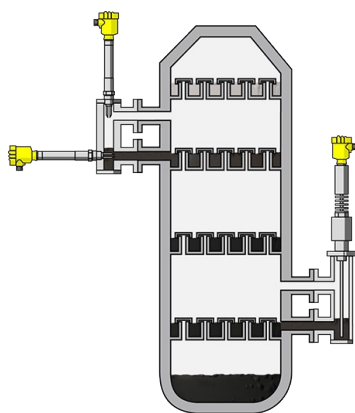

#### VEGAFLEX 86

Level measurement with guided wave radar in the depropanizer

- Non-moving parts are immune to mechanical failure
- Low maintenance requirements reduce downtime and costs
- Certain measurement even by changing process conditions

[Show Product](#)

#### VEGASWING 66

Vibrating level switch for monitoring high and low alarm in the depropanizer

- Reliable measurement unaffected by high temperature and pressure
- Test function during operation provides higher plant availability
- Redundancy increases plant safety and availability

[Show Product](#)

PRO

**VEGAFLEX 86**  
[Show Product](#)

**Measuring range - Distance**  
 75 m

**Process temperature**  
 -196 ... 450 °C

**Process pressure**  
 -1 ... 400 bar

**Accuracy**  
 ± 2 mm

**Version**  
 Coax version ø 21.3 mm with multiple hole  
 Coax version ø 42.2 mm with single hole  
 Coax version ø 42.2 mm with multiple hole  
 Exchangeable rod ø 16 mm  
 Exchangeable cable ø 2 mm with gravity weight  
 Exchangeable cable ø 4 mm with gravity weight  
 Exchangeable cable ø 2 mm with centering weight  
 Exchangeable cable ø 4 mm with centering weight

**Materials, wetted parts**  
 316L  
 Alloy C22 (2.4602)  
 316

**Threaded connection**  
 ≥ G¾, ≥ ¾ NPT

**Flange connection**  
 ≥ DN25, ≥ 1"

**Seal material**  
 FFKM  
 graphit and ceramic

**Housing material**  
 Plastic  
 Aluminium  
 Stainless steel (precision casting)  
 Stainless steel (electropolished)

PRO

**VEGASWING 66**  
[Show Product](#)

**Process temperature**  
 -196 ... 450 °C

**Process pressure**  
 -1 ... 160 bar

**Version**  
 Compact version  
 with gas-tight leadthrough  
 with tube extension

**Materials, wetted parts**  
 316L  
 Alloy C22 (2.4602)  
 Inconel 718

**Threaded connection**  
 G1, 1 NPT, R1

**Flange connection**  
 ≥ DN50, ≥ 2"

**Seal material**  
 no media contact

**Housing material**  
 Plastic  
 Aluminium  
 Stainless steel (precision casting)  
 Stainless steel (electropolished)

**Protection rating**  
 IP66/IP67  
 IP66/IP68 (1 bar)  
 IP65

**Output**  
 Relay (DPDT)  
 Transistor (NPN/PNP)  
 Two-wire