



Reliable

Safe, reliable measurement from the outside through the bag

Cost effective

Time and cost-intensive CIP/SIP cleaning no longer required

User friendly


Simple integration and setup

Disposable plastic container

Level measurement in disposable plastic containers

When very small product batches are produced in the pharmaceutical industry, disposable plastic containers are often used. These are essentially polymer bags in which a fermentation process takes place or which contain a certain medium or buffer. Continuous level measurement is required to ensure high process efficiency.

[More details](#)

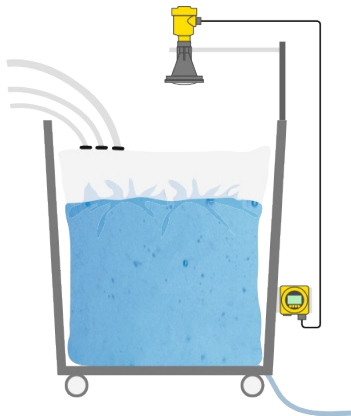

VEGAPULS 6X

Level measurement with radar in disposable containers

- Wide dynamic range enables level measurement through plastic
- Reliable measurement, independent of the medium
- No cleaning of sensor necessary, as measurement is done from the outside

[Show Product](#)



VEGADIS 81

External display and adjustment unit for plics® sensors

- Measured value display and sensor adjustment in a readily accessible location
- Simple operation, graphically supported with clearly structured program guidance
- Convenient connection directly to the sensor without further measures

[Show Product](#)

VEGAPULS 6X[Show Product](#)**Measuring range - Distance**

120 m

Process temperature

-196 ... 450 °C

Process pressure

-1 ... 160 bar

Accuracy

± 1 mm

Frequency

6 GHz

26 GHz

80 GHz

Beam angle

≥ 3°

Materials, wetted parts

PTFE

PVDF

316L

PP

PEEK

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN20, ≥ ¾"

Hygienic fittings

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -

DIN11864-1-A

Hygienic flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-

3-A

DRD connection ø 65 mm

SMS 1145 DN51

VEGADIS 81[Show Product](#)**Housing material**

Plastic

Aluminium

Stainless steel (precision casting)

Protection rating

IP66/IP67

Ambient temperature

-20 ... 70 °C

Signal input (specify)

plics sensor (serial)

Signal output (specify)

Display