



Reliable

Reliable measurement ensures reliable operation of the plant

Cost effective

High plant efficiency thanks to precise measurement technology

User friendly


Maintenance and trouble free operation

Evaporation chamber

Level and pressure measurement in multi-stage evaporation systems

In thermal seawater desalination, the drinking water is produced in multi-stage evaporation processes. By connecting the various stages in series with ever lower temperatures, the system's coefficient of performance is significantly increased and its overall efficiency enhanced. Reliable monitoring of the pressures and levels in the various stages is an important prerequisite for optimal operation of the plant.

[More details](#)

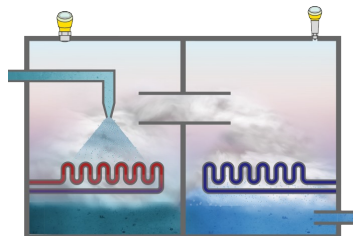

VEGAPULS 31

Radar sensor for continuous level measurement in the evaporation chamber

- Exact measuring results unaffected by condensate and agitated surface
- High plant availability thanks to wear and maintenance free measurement
- Secure wireless operation with smartphone, tablet or PC

[Show Product](#)



VEGABAR 38

Pressure sensor for monitoring pressure in the evaporation chamber

- High accuracy without long-term drift
- 360° status display for quick and easy recognition of switching status
- Simple and fast setup

[Show Product](#)

BASIC

VEGAPULS 31
[Show Product](#)


Measuring range - Distance
15 m

Process temperature
-40 ... 80 °C

Process pressure
-1 ... 3 bar

Accuracy
± 2 mm

Frequency
80 GHz

Beam angle
8°

Materials, wetted parts
PVDF

Threaded connection
G1½, 1½ NPT, R1½

Seal material
FKM

Housing material
Plastic

BASIC

VEGABAR 38
[Show Product](#)


Measuring range - Pressure
-1 ... 60 bar

Process temperature
-40 ... 130 °C

Accuracy
0.3 %

Materials, wetted parts
PVDF
316L
Duplex (1.4462)
Ceramic

Threaded connection
≥ G½, ≥ ½ NPT

Hygienic fittings
Clamp ≥ 2" - DN50 - DIN32676, ISO2852
Clamp ≥ 1" - DIN32676, ISO2852
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 1½", ≥ DN40 - DIN 11851
Slotted nut ≥ DN25 - DIN 11851
SMS DN38
Hygienic fittings ≥ DN25 - DIN11864-1-A
Hygienic fittings ≥ DN40 - DIN11864-1-A
Varivent N50-40
SMS DN25
Ingold connection PN10
Varivent F25

Seal material
EPDM
FKM
FFKM

Housing material
Plastic

Protection rating
IP66/IP67
IP65

Output
4 ... 20 mA
Three-wire (PNP/NPN, 4 ... 20 mA)
IO-Link