



#### Reliable

Overload resistant, ceramic CERTEC® measuring cell

#### Cost effective

One sensor, two measured values:  
simultaneous measurement of temperature and pressure

#### User friendly


Long service life with low maintenance

## Primary reformer

### Pressure measurement at the inlet of the primary reformer

In the primary reformer, methane gas and water vapour react into hydrogen, oxygen, carbon monoxide and carbon dioxide at a pressure of around 30 bar and a temperature of 870 °C. Since the temperature in the reformer is very high, pressure is measured at the inlet via a temperature adapter. The temperature also needs to be measured in order to regulate the process.

[More details](#)

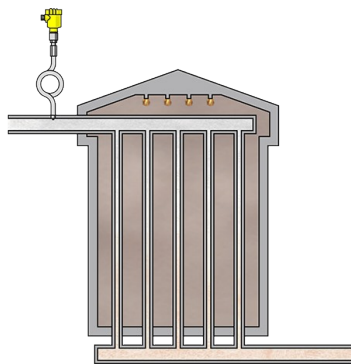

### VEGABAR 82

Pressure transmitter for measuring pressure at the inlet of the primary reformer

- Extremely rugged ceramic CERTEC® measuring cell with high overload resistance
- Pressure transmitter with integrated temperature sensor
- Available with SIL2 approval

[Show Product](#)

**VEGABAR 82**[Show Product](#)**Measuring range - Distance**

-

**Measuring range - Pressure**

-1 ... 100 bar

**Process temperature**

-40 ... 150 °C

**Process pressure**

-1 ... 100 bar

**Accuracy**

0.05 %

**Materials, wetted parts**

PVDF

316L

Alloy C22 (2.4602)

PP

1.4057

1.4410

Alloy C276 (2.4819)

Duplex (1.4462)

Titanium Grade 2 (3.7035)

**Threaded connection**

≥ G½, ≥ ½ NPT

**Flange connection**

≥ DN15, ≥ ½"

**Hygienic fittings**

Clamp ≥ 1" - DIN32676, ISO2852

Slotted nut ≥ DN25 - DIN 11851

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

DRD connection ø 65 mm

SMS 1145 DN51

SMS DN38

Swagelok VCR screwing

Varivent G125

Varivent N50-40

for NEUMO BioControl D50 PN16 / 316L

**Seal material**

EPDM

FKM

FFKM