



Reliable

Reliable measurement in all types of media

Cost effective

Optimal material storage

User friendly


Maintenance-free operation

Mixing tower

Level measurement and point level detection in mixing towers

Materials such as concrete and mortar are needed in widely different compositions depending on the application. The various raw materials are stored in segmented towers, which then blend cement, lime and other aggregates according to specific requirements. In each individual segment, reliable level measurement and point level detection ensure the constant availability of the raw materials and cost-effective operation of the plant.

[More details](#)

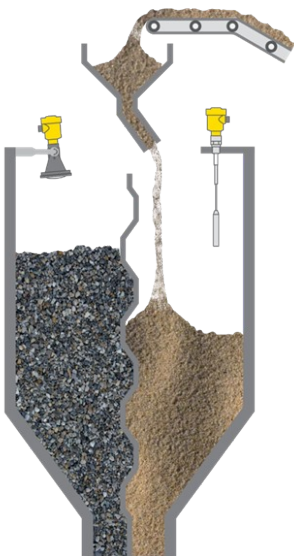

VEGAPULS 6X

Radar sensor for non-contact level measurement in mixing towers

- Easy alignment of the measuring instrument thanks to integrated swivel mount and app for smartphones
- Reliable measurement in spite of dust, noise and internal structures
- Wear and maintenance-free, ensures continuous operation of the plant

[Show Product](#)



VEGACAP 65

Point level detection with capacitive probe in mixing towers

- Reliable measurement despite buildup and dust
- Long service life thanks to robust construction
- Simple installation and setup

[Show Product](#)

PRO

PRO

VEGAPULS 6X[Show Product](#)**Measuring range - Distance**

120 m

Process temperature

-196 ... 450 °C

Process pressure

-1 ... 160 bar

Accuracy

± 1 mm

Frequency

6 GHz

26 GHz

80 GHz

Beam angle

≥ 3°

Materials, wetted parts

PTFE

PVDF

316L

PP

PEEK

Threaded connection

≥ G¾, ≥ ¾ NPT

Flange connection

≥ DN20, ≥ ¾"

Hygienic fittings

Clamp ≥ 1½" - DIN32676, ISO2852

Slotted nut ≥ 2", DN50 - DIN 11851

Varivent ≥ DN25

hygienic fitting with tension flange DN32

hygienic fitting F40 with compression nut

Hygienic screw connections ≥ DN50 tube ø53 -

DIN11864-1-A

Hygienic flange connection ≥ DN50 DIN11864-2

Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-

3-A

DRD connection ø 65 mm

SMS 1145 DN51

VEGACAP 65[Show Product](#)**Measuring range - Distance**

-

Process temperature

-50 ... 200 °C

Process pressure

-1 ... 64 bar

Version

Cable ø 6 mm with screening tube without weight

Cable ø 6 mm with screening tube and gravity weight

Cable ø 6 mm with gravity weight

Cable ø 8 mm with abrasion protection without weight

Cable ø 8 mm with abrasion protection and gravity weight

Cable ø 8 mm with gravity weight

PA cable ø 12 mm with screening tube and gravity weight

Materials, wetted parts

PTFE

316L

PA

PEEK

Steel

Threaded connection

≥ G1, ≥ 1 NPT

Flange connection

≥ DN50, ≥ 2"

Housing material

Plastic

Aluminium

Stainless steel (precision casting)

Stainless steel (electropolished)

Protection rating

IP66/IP68 (0,2 bar)

IP66/IP67

IP66/IP68 (1 bar)

Output

Relay (DPDT)

Contactless electronic switch

Transistor (NPN/PNP)

Two-wire