



Reliable

Reliable measurement in all types of media

Cost effective

Optimal material storage

User friendly


Maintenance-free operation

Mixing tower

Level measurement and point level detection in mixing towers

Materials such as concrete and mortar are needed in widely different compositions depending on the application. The various raw materials are stored in segmented towers, which then blend cement, lime and other aggregates according to specific requirements. In each individual segment, reliable level measurement and point level detection ensure the constant availability of the raw materials and cost-effective operation of the plant.

[More details](#)

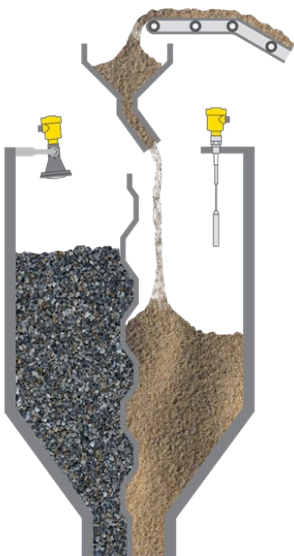

VEGAPULS 6X

Radar sensor for non-contact level measurement in mixing towers

- Easy alignment of the measuring instrument thanks to integrated swivel mount and app for smartphones
- Reliable measurement in spite of dust, noise and internal structures
- Wear and maintenance-free, ensures continuous operation of the plant

[Show Product](#)



VEGACAP 65

Point level detection with capacitive probe in mixing towers

- Reliable measurement despite buildup and dust
- Long service life thanks to robust construction
- Simple installation and setup

[Show Product](#)

PRO

VEGAPULS 6X

[Show Product](#)



Measuring range - Distance
120 m

Process temperature
-196 ... 450 °C

Process pressure
-1 ... 160 bar

Accuracy
± 1 mm

Frequency
6 GHz
26 GHz
80 GHz

Beam angle
≥ 3°

Materials, wetted parts
PTFE
PVDF
316L
PP
PEEK

Threaded connection
≥ G¾, ≥ ¾ NPT

Flange connection
≥ DN20, ≥ ¾"

Hygienic fittings
Clamp ≥ 1½" - DIN32676, ISO2852
Slotted nut ≥ 2", DN50 - DIN 11851
Varivent ≥ DN25
hygienic fitting with tension flange DN32
hygienic fitting F40 with compression nut
Hygienic screw connections ≥ DN50 tube ø53 -
DIN11864-1-A
Hygienic flange connection ≥ DN50 DIN11864-2
Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-3-A
DRD connection ø 65 mm
SMS 1145 DN51

PRO

VEGACAP 65

[Show Product](#)



Measuring range - Distance
-

Process temperature
-50 ... 200 °C

Process pressure
-1 ... 64 bar

Version
Cable ø 6 mm with screening tube without weight
Cable ø 6 mm with screening tube and gravity weight
Cable ø 6 mm with gravity weight
Cable ø 8 mm with abrasion protection without weight
Cable ø 8 mm with abrasion protection and gravity weight
Cable ø 8 mm with gravity weight
PA cable ø 12 mm with screening tube and gravity weight

Materials, wetted parts
PTFE
316L
PA
PEEK
Steel

Threaded connection
≥ G1, ≥ 1 NPT

Flange connection
≥ DN50, ≥ 2"

Housing material
Plastic
Aluminium
Stainless steel (precision casting)
Stainless steel (electropolished)

Protection rating
IP66/IP68 (0,2 bar)
IP66/IP67
IP66/IP68 (1 bar)

Output
Relay (DPDT)
Contactless electronic switch
Transistor (NPN/PNP)
Two-wire