



### Reliable

Approved materials according to FDA and EC 1935/2004, as well as local certification

### Cost effective

Efficient cleaning of the filter is possible even during continuous operation

### User friendly

Maintenance-friendly thanks to front-flush mounting

## Osmosis filter

### Differential pressure measurement in an osmosis filter

Sea water is pressed through a semi-permeable membrane under high pressure. The semi-permeable membrane allows only water molecules to seep through. Salts, bacteria and viruses are retained in the filter. The finished product is almost the same as distilled water. A differential pressure measurement is needed to monitor the level of contamination across the filter.

#### More details



### VEGADIF 85

Differential pressure transmitter for measuring the level of contamination in the filter

- Highly accurate measurement of the smallest differential pressure
- High reliability with integrated overload diaphragm system
- Static pressure output also possible through integrated sensor for multi parameter measurement

#### Show Product



### VEGADIS 81

External display and adjustment unit for 4 ... 20 mA HART sensors

- Simple voltage supply of display via the existing 4 ... 20 mA current loop
- Easy-to-read display in plain text with additional graphical support menu
- Simple operation via four buttons and a clearly structured menu

#### Show Product




### Mounting bracket for VEGADIF

Mounting bracket for differential pressure transmitter

- Weatherproof and robust 304 stainless steel construction
- Simple wall or pipe mounting

#### Show Product

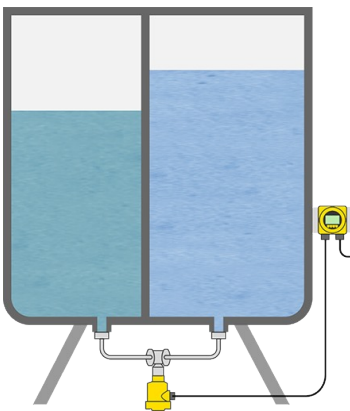

**VEGADIF 85**  
[Show Product](#)



**VEGADIS 81**  
[Show Product](#)



**Mounting bracket for VEGADIF**  
[Show Product](#)



**Measuring range - Pressure**  
 -40 ... 40 bar

**Process temperature**  
 -40 ... 105 °C

**Process pressure**  
 -1 ... 400 bar

**Accuracy**  
 0.065 %

**Materials, wetted parts**  
 316L  
 Tantalum  
 Alloy C276 (2.4819)  
 Monel

**Threaded connection**  
 ¼ - 18 NPT

**Flange connection**  
 ≥ DN32, ≥ 1½"

**Seal material**  
 EPDM  
 FKM  
 Copper

**Housing material**  
 Plastic  
 Aluminium  
 Stainless steel (precision casting)  
 Stainless steel (electropolished)

**Protection rating**  
 IP66/IP68 (0,2 bar)  
 IP66/IP67  
 IP66/IP68 (1 bar)

**Housing material**  
 Plastic  
 Aluminium  
 Stainless steel (precision casting)

**Protection rating**  
 IP66/IP67

**Ambient temperature**  
 -20 ... 70 °C

**Signal input (specify)**  
 plics sensor (serial)

**Signal output (specify)**  
 Display