



#### Reliable

High operational reliability under all process conditions

#### Cost effective

Simple to install, even in existing plants

#### User friendly


Maintenance-free operation

## Steam boiler

### Level measurement and point level detection in process steam generation

High process pressures and a highly compressed vapour phase are the normal operating conditions inside boilers. The size of the steam generator is what determines the quantity of saturated steam that can be fed into a heat exchanger. Reliable control of the water level and limitation of high and low water levels are therefore extremely important.

[More details](#)

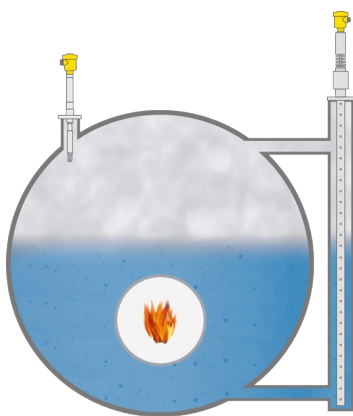

#### VEGAFLEX 86

Level measurement with guided radar for optimization of steam generation in boilers

- Approved acc. to EN 12952-11 and EN 12953-9 as limiting device for high and low water in the boiler
- Automatic runtime adjustment ensures accurate measurement, even under changing vapour pressures
- High system reliability through automatic self-monitoring
- Safe for use up to SIL2/3 according to IEC 61508

[Show Product](#)



#### VEGASWING 66

Vibrating level switch for high and low water limitation in steam boilers

- Ceramic materials allow use at temperatures up to 450 °C and pressures up to 160 bar
- Density changes and changes in conductivity or saturated steam consistency do not influence the measurement
- Continuous self-monitoring as well as fast and reliable function testing via keystroke
- Safe for use up to SIL2/3 according to IEC 61508

[Show Product](#)

PRO

### VEGAFLEX 86

[Show Product](#)



**Measuring range - Distance**  
75 m

**Process temperature**  
-196 ... 450 °C

**Process pressure**  
-1 ... 400 bar

**Accuracy**  
± 2 mm

**Version**  
Coax version ø 21.3 mm with multiple hole  
Coax version ø 42.2 mm with single hole  
Coax version ø 42.2 mm with multiple hole  
Exchangeable rod ø 16 mm  
Exchangeable cable ø 2 mm with gravity weight  
Exchangeable cable ø 4 mm with gravity weight  
Exchangeable cable ø 2 mm with centering weight  
Exchangeable cable ø 4 mm with centering weight

**Materials, wetted parts**  
316L  
Alloy C22 (2.4602)  
316

**Threaded connection**  
≥ G¾, ≥ ¾ NPT

**Flange connection**  
≥ DN25, ≥ 1"

**Seal material**  
FFKM  
graphit and ceramic

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

PRO

### VEGASWING 66

[Show Product](#)



**Process temperature**  
-196 ... 450 °C

**Process pressure**  
-1 ... 160 bar

**Version**  
Compact version  
with gas-tight leadthrough  
with tube extension

**Materials, wetted parts**  
316L  
Alloy C22 (2.4602)  
Inconel 718

**Threaded connection**  
G1, 1 NPT, R1

**Flange connection**  
≥ DN50, ≥ 2"

**Seal material**  
no media contact

**Housing material**  
Plastic  
Aluminium  
Stainless steel (precision casting)  
Stainless steel (electropolished)

**Protection rating**  
IP66/IP67  
IP66/IP68 (1 bar)  
IP65

**Output**  
Relay (DPDT)  
Transistor (NPN/PNP)  
Two-wire