

### Reliable

Certified hygienic design (3A/EHEDG) and approved materials according to EC 1935/2004 and FDA

### Cost effective

Continuous operation with absolute hygiene

### User friendly


Standardized adjustment, process data storable and transferable

## Mixing Vessel

### Level measurement in the mixing vessel and pressure measurement in the supply line

Mixing vessels are applied for preparation, storage and transfer of a wide range of pharmaceutical products. These vessels are used for the manufacture of antibiotics, blood plasma products, and injection and infusion solutions. Following preparation, substances are transferred to a filling station. To ensure a reliable process, the liquid level in the mixing vessel must be reliably and continuously monitored.

[More details](#)

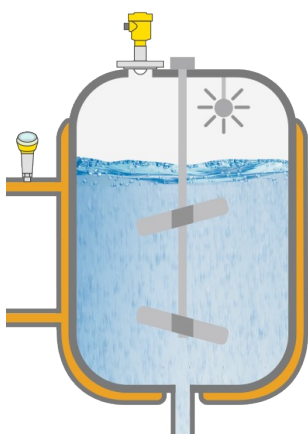

### VEGABAR 38

Pressure monitoring with IO-Link connection in the supply line of the heating medium

- Reliable measurement thanks to fast response time
- Robust ceramic CERTEC® measuring cell guarantees a long service life
- Simple operation thanks to VDMA menu structure and integrated display

[Show Product](#)



### VEGPULS 6X

Level measurement with radar in the mixing vessel

- Reliable level measurement, independent of process conditions such as vacuum, pressure, temperature and changing product density
- Flange with encapsulated antenna system allows optimal CIP and SIP cleaning
- The small beam angle and good focussing of the sensor allows easy alignment

[Show Product](#)

## BASIC

**VEGABAR 38**  
[Show Product](#)
**Measuring range - Pressure**

-1 ... 60 bar

**Process temperature**

-40 ... 130 °C

**Accuracy**

0.3 %

**Materials, wetted parts**

PVDF  
 316L  
 Duplex (1.4462)  
 Ceramic

**Threaded connection**≥ G $\frac{1}{2}$ , ≥  $\frac{1}{2}$  NPT**Hygienic fittings**

Clamp ≥ 2", DN50 - DIN32676, ISO2852  
 Clamp ≥ 1" - DIN32676, ISO2852  
 Clamp ≥ 1½" - DIN32676, ISO2852  
 Slotted nut ≥ 1½", ≥ DN40 - DIN 11851  
 Slotted nut ≥ DN25 - DIN 11851  
 SMS DN38  
 Hygienic fittings ≥ DN25 - DIN11864-1-A  
 Hygienic fittings ≥ DN40 - DIN11864-1-A  
 Varivent N50-40  
 SMS DN25  
 Ingold connection PN10  
 Varivent F25

**Seal material**

EPDM  
 FKM  
 FFKM

**Housing material**

Plastic

**Protection rating**

IP66/IP67  
 IP65

**Output**

4 ... 20 mA  
 Three-wire (PNP/NPN, 4 ... 20 mA)  
 IO-Link

## PRO

**VEGPULS 6X**  
[Show Product](#)
**Measuring range - Distance**

120 m

**Process temperature**

-196 ... 450 °C

**Process pressure**

-1 ... 160 bar

**Accuracy**

± 1 mm

**Frequency**

6 GHz  
 26 GHz  
 80 GHz

**Beam angle**

≥ 3°

**Materials, wetted parts**

PTFE  
 PVDF  
 316L  
 PP  
 PEEK

**Threaded connection**≥ G $\frac{3}{4}$ , ≥  $\frac{3}{4}$  NPT**Flange connection**≥ DN20, ≥  $\frac{3}{4}$ "**Hygienic fittings**

Clamp ≥ 1½" - DIN32676, ISO2852  
 Slotted nut ≥ 2", DN50 - DIN 11851  
 Varivent ≥ DN25  
 hygienic fitting with tension flange DN32  
 hygienic fitting F40 with compression nut  
 Hygienic screw connections ≥ DN50 tube ø53 -  
 DIN11864-1-A  
 Hygienic flange connection ≥ DN50 DIN11864-2  
 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-  
 3-A  
 DRD connection ø 65 mm  
 SMS 1145 DN51