



### Reliable

Diverse technologies with comparative output can provide redundant level measurement

### Cost effective

Materials with high chemical resistance reduce maintenance costs

### User friendly


Easy installation and setup

## Compressor knockout drum

### Level measurement in the compressor knockout drum

The vapour liquid separation that occurs in a knockout drum protects the waste or cooling stream from process vapours and compressors from water. This crucial measurement point means it requires constant, reliable level monitoring without being influenced by the high volume of vapour inside the vessel. A reliable instrument ensures that there is no water carry-over into the compressor, avoiding the extremely expensive downtime that results from an upset.

[More details](#)

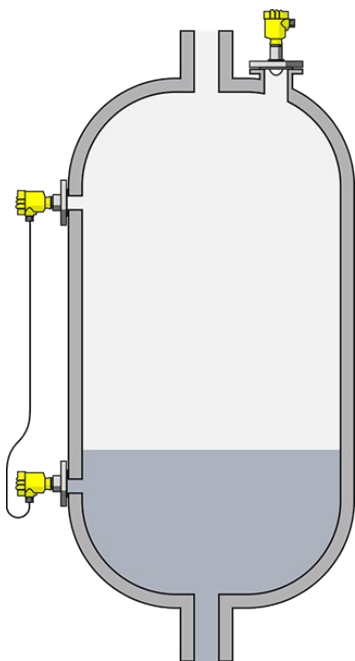

### VEGAPULS 6X

Level measurement with radar in the compressor knockout drum

- Reliable measurement, unaffected by vapour presence
- Easy installation directly in the drum
- Unaffected by changing density

[Show Product](#)



### VEGABAR 82

Electronic differential pressure system for measurement redundancy in the compressor knockout drum

- No additional temperature influences because no liquid capillary connection required
- Very good reproducibility and long-term stability
- High resistance diaphragm materials
- Easy installation because no insulation for capillary needed

[Show Product](#)

PRO

PRO

**VEGAPULS 6X**  
[Show Product](#)

**Measuring range - Distance**  
 120 m

**Process temperature**  
 -196 ... 450 °C

**Process pressure**  
 -1 ... 160 bar

**Accuracy**  
 ± 1 mm

**Frequency**  
 6 GHz  
 26 GHz  
 80 GHz

**Beam angle**  
 ≥ 3°

**Materials, wetted parts**  
 PTFE  
 PVDF  
 316L  
 PP  
 PEEK

**Threaded connection**  
 ≥ G¾, ≥ ¾ NPT

**Flange connection**  
 ≥ DN20, ≥ ¾"

**Hygienic fittings**  
 Clamp ≥ 1½" - DIN32676, ISO2852  
 Slotted nut ≥ 2", DN50 - DIN 11851  
 Varivent ≥ DN25  
 hygienic fitting with tension flange DN32  
 hygienic fitting F40 with compression nut  
 Hygienic screw connections ≥ DN50 tube ø53 -  
 DIN11864-1-A  
 Hygienic flange connection ≥ DN50 DIN11864-2  
 Hygienic clamp connection ≥ DN50 pipe Ø53 - DIN11864-  
 3-A  
 DRD connection ø 65 mm  
 SMS 1145 DN51

**VEGABAR 82**  
[Show Product](#)

**Measuring range - Distance**  
 -

**Measuring range - Pressure**  
 -1 ... 100 bar

**Process temperature**  
 -40 ... 150 °C

**Process pressure**  
 -1 ... 100 bar

**Accuracy**  
 0.05 %

**Materials, wetted parts**  
 PVDF  
 316L  
 Alloy C22 (2.4602)  
 PP  
 1.4057  
 1.4410  
 Alloy C276 (2.4819)  
 Duplex (1.4462)  
 Titanium Grade 2 (3.7035)

**Threaded connection**  
 ≥ G½, ≥ ½ NPT

**Flange connection**  
 ≥ DN15, ≥ ½"

**Hygienic fittings**  
 Clamp ≥ 1" - DIN32676, ISO2852  
 Slotted nut ≥ DN25 - DIN 11851  
 hygienic fitting with tension flange DN32  
 hygienic fitting F40 with compression nut  
 DRD connection ø 65 mm  
 SMS 1145 DN51  
 SMS DN38  
 Swagelok VCR screwing  
 Varivent G125  
 Varivent N50-40  
 for NEUMO BioControl D50 PN16 / 316L

**Seal material**  
 EPDM  
 FKM  
 FFKM