



Reliable

Safe measurement unaffected by process conditions

Cost effective

Continuous measurement allows effective process control

User friendly


Compact design

Hydrocracker

Density measurement in the hydrocracker

Heavy oil residues are processed in the hydrocracker, such as atmospheric and vacuum residue. Fresh catalyst is continuously added and used catalyst is withdrawn, enabling product quality over time. To promote safe and efficient heavy oil processing, a reliable measurement and density profiling is needed for control of critical process stages.

[More details](#)

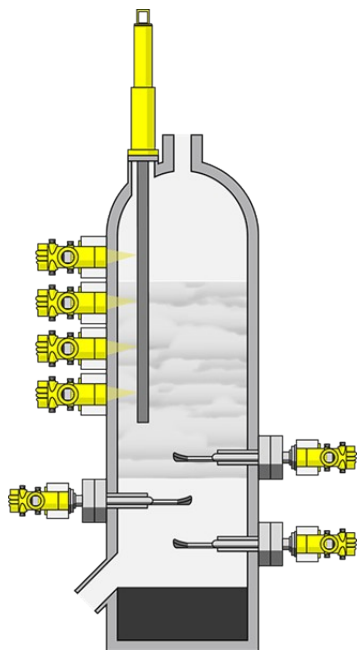

MINITRAC 31

Radiation-based sensor for density measurement

- Compact and lightweight detector mounts easily
- Patented coaxial source drywell simplifies mounting and reduces installation costs
- Non-contact technology measures through vessel walls and obstructions

[Show Product](#)

MINITRAC 31
[Show Product](#)**Measuring range - Distance**

-

Process temperature

-40 ... 60 °C

Process pressure

-

Accuracy

0.1 %

Materials, wetted parts

No wetted material

Seal material

no media contact

Housing materialAluminium
Stainless steel (precision casting)**Protection rating**

IP66/IP67

OutputProfibus PA
Foundation Fieldbus
Four-wire: 4 ... 20 mA/HART**Ambient temperature**

-40 ... 60 °C