



### Reliable

Safe and reliable measurement even at extreme temperatures

### Cost effective

Maintenance-free operation

### User friendly


Easy installation

## Reboiler

### Level measurement in the reboiler

Evaporators are heat exchangers that are deployed at the bottom of distillation columns. In the evaporator, the residue is boiled up from the sump and fed back into the distillation process. Precise control of the level in the evaporator ensures efficient operation of the plant. A reliable measurement also ensures that the heating coils are always covered with liquid, to prevent any overheating incidents.

#### [More details](#)

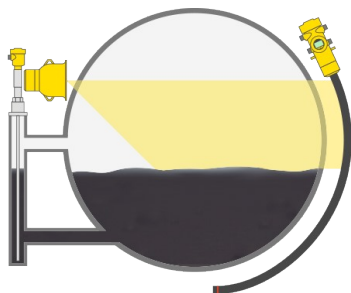

### VEGAFLEX 86

Level measurement with guided wave radar in the reboiler

- Reliable measurement unaffected by vapour presence and high temperatures
- Flexible mounting possibilities in the tank or in a bridle
- Robust material options are resistant to extreme process conditions

[Show Product](#)



### FIBERTRAC 31

Radiation-based sensor for continuous level measurement in the reboiler

- Non-contact operation is unaffected by process temperature
- Lightweight detector eliminates need for cranes or special rigging
- Small bend radius of flexible detector mounts to vessel shape
- Cost savings, as no servicing of the measuring system is required

[Show Product](#)



### VEGASOURCE 82

The source holder is used to hold and secure the radioactive source

- Small footprint and simple installation
- Operational reliability through pneumatic opening and closing of the source container
- Trustworthy shielding allows use without control area

[Show Product](#)

PRO

**VEGAFLEX 86**  
[Show Product](#)

**Measuring range - Distance**  
 75 m

**Process temperature**  
 -196 ... 450 °C

**Process pressure**  
 -1 ... 400 bar

**Accuracy**  
 ± 2 mm

**Version**  
 Coax version ø 21.3 mm with multiple hole  
 Coax version ø 42.2 mm with single hole  
 Coax version ø 42.2 mm with multiple hole  
 Exchangeable rod ø 16 mm  
 Exchangeable cable ø 2 mm with gravity weight  
 Exchangeable cable ø 4 mm with gravity weight  
 Exchangeable cable ø 2 mm with centering weight  
 Exchangeable cable ø 4 mm with centering weight

**Materials, wetted parts**  
 316L  
 Alloy C22 (2.4602)  
 316

**Threaded connection**  
 ≥ G¾, ≥ ¾ NPT

**Flange connection**  
 ≥ DN25, ≥ 1"

**Seal material**  
 FFKM  
 graphit and ceramic

**Housing material**  
 Plastic  
 Aluminium  
 Stainless steel (precision casting)  
 Stainless steel (electropolished)

PRO

**FIBERTRAC 31**  
[Show Product](#)

**Measuring range - Distance**  
 7 m

**Process pressure**  
 -

**Accuracy**  
 ± 0.5 %

**Density**  
 Density

**Materials, wetted parts**  
 No wetted material

**Threaded connection**  
 Mounting from outside via supplied mounting brackets

**Seal material**  
 no media contact

**Housing material**  
 Aluminium  
 Stainless steel (precision casting)

**Protection rating**  
 IP66/IP67

**Output**  
 Profibus PA  
 Foundation Fieldbus  
 Four-wire: 4 ... 20 mA/HART

**VEGASOURCE 82**  
[Show Product](#)
