



Reliable

Overload resistant, ceramic CERTEC® measuring cell

Cost effective

One sensor, two measured values:
simultaneous measurement of temperature and pressure

User friendly


Long service life with low maintenance

Primary reformer

Pressure measurement at the inlet of the primary reformer

In the primary reformer, methane gas and water vapour react into hydrogen, oxygen, carbon monoxide and carbon dioxide at a pressure of around 30 bar and a temperature of 870 °C. Since the temperature in the reformer is very high, pressure is measured at the inlet via a temperature adapter. The temperature also needs to be measured in order to regulate the process.

[More details](#)

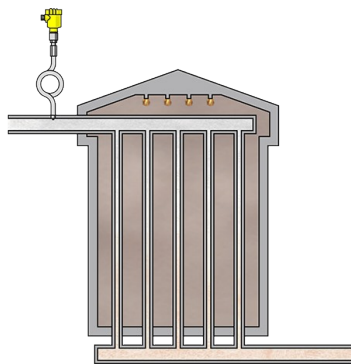

VEGABAR 82

Pressure transmitter for measuring pressure at the inlet of the primary reformer

- Extremely rugged ceramic CERTEC® measuring cell with high overload resistance
- Pressure transmitter with integrated temperature sensor
- Available with SIL2 approval

[Show Product](#)

VEGABAR 82

[Show Product](#)**Measuring range - Distance**

-

Measuring range - Pressure

-1 ... 100 bar

Process temperature

-40 ... 150 °C

Process pressure

-1 ... 100 bar

Accuracy

0.05 %

Materials, wetted parts

PVDF
 316L
 Alloy C22 (2.4602)
 PP
 1.4057
 1.4410
 Alloy C276 (2.4819)
 Duplex (1.4462)
 Titanium Grade 2 (3.7035)

Threaded connection

≥ G½, ≥ ½ NPT

Flange connection

≥ DN15, ≥ ½"

Hygienic fittings

Clamp ≥ 1" - DIN32676, ISO2852
 Slotted nut ≥ DN25 - DIN 11851
 hygienic fitting with tension flange DN32
 hygienic fitting F40 with compression nut
 DRD connection ø 65 mm
 SMS 1145 DN51
 SMS DN38
 Swagelok VCR screwing
 Varivent G125
 Varivent N50-40
 for NEUMO BioControl D50 PN16 / 316L

Seal material

EPDM
 FKM
 FFKM